

process networking solutions

Junction Module (JM™) Enclosure with:



AS-Interface Power Conditioner Module (JMX05)

Converts any 30 VDC power supply to an AS-Interface Power Supply by providing the data decoupling function.


Can be used to power multiple AS-Interface segments with one power supply. Allows remote placement of the power supply that does not add to the AS-I Network total length.

Features

- Allows for a single power supply to power multiple AS-Interface segments
- Common terminals for power supply input.
- Allows for remote location of power supply
- LED indication of input voltage status

(See Page 3 detailed wiring instructions)




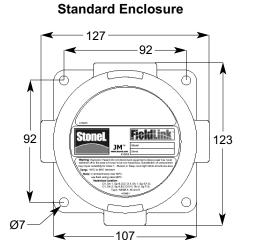


JM Enclosure Dimensions (in mm)

Switched Enclosure

Enclosure w/Cyclone Valve





Approval Agency Controlled Document. No Changes Authorized Without Prior Agency Approval



StoneL Corporation One StoneL Dr 26275 US Hwy 59 Fergus Falls, MN 56537 USA

Telephone: 218.739.5774 Toll Free: 800.843.7866 Fax: 218.739.5776 E-mail: sales@stonel.com Website: www.stonel.com

		JM Model Options	Pu	ub #105239revA Page 2
		Example: JMX0511E3		
	Function	Solenoid	Enclosure	Conduit Entries
JM	X05 AS-Interface Power Conditioner	11 No Solenoid	C Clear Cover	3 (3) 1/2" NPT
		(Not available with solenoid)	E Epoxy Coated	N (4) 1/2" NPT
			Aluminum	6 (3) M20
				M (4) M20
				9 (3) 3/4" NPT
				T (4) 3/4" NPT

General Specifications

Operating Life	Unlimited	Temperature Range	
Materials of Construct	Enclosure Protection		
Housing and Cover	Marine grade anodized aluminum	Hazardous Area Rati	
	epoxy coating	Explosion Proof (Alur	
Clear Cover	Lexan® Polycarbonate	Class I, Div. 1 and 2, 0	
Elastomer Seals	Buna-N	Class II, Div. 1 and 2,	
Fasteners	Stainless Steel	Non-incendive (Clear	
Warranty		Class I, Div. 2, Groups	
Complete Assemblies	Two Years	Class II, Div. 2, Group	
· · · · · · · · · · · · · · · · · · ·		(Not all units carry and	

Enclosure ProtectionNEMA 4, 4X & 6; IP67Hazardous Area RatingsExplosion Proof (Aluminum Cover)Class I, Div. 1 and 2, Groups B,C,DClass II, Div. 1 and 2, Groups E,F,GNon-incendive (Clear Cover)Class I, Div. 2, Groups A,B,C,DClass II, Div. 2, Groups E,F,G(Not all units carry approvals, consult factory)

-40° to +80° C (-23° to 180° F)

Lexan is a registered trademark of General Electric Corporation.

Mounting Instructions

Mounting The JM Enclosure


- 1. Locate the position where the JM enclosure will be mounted. Ensure that there is sufficient room to operate the disconnect switch levers and to remove the cover.
- 2. Attach the JM enclosure to a wall or other stationary flat surface using the mounting holes provided.
- 3. Secure the cover until hand tight

Attaching Conduit and Fittings

- 1. Conduit entries are provided for the convenient attachment of threaded conduit and threaded conduit fittings. Attach threaded fittings and conduits securely.
- 2. Follow all applicable NEC codes and other regulations.

Installing & Removing Cover

1. To insure NEMA 4, 4X. 6 and hazardous location ratings are maintained the cover **must be** completely closed and the O-Ring sealed to keep out water.

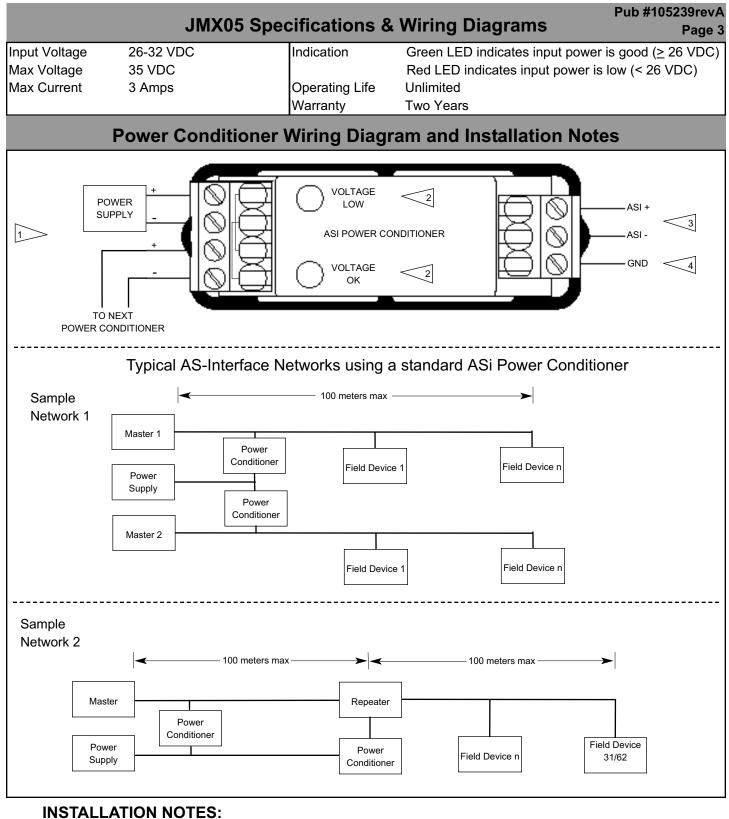

1. Power supply connection points. (30 VDC; 3 A (max) power supplies recommended). (+) and (-) terminals are

- connected together internal to the Power Conditioner.
- 2 2. Input power supply voltage monitoring LED's. Voltage OK (Green LED) indicates input voltage is good (≥ 26 VDC). Voltage Low (Red LED) indicates input voltage is low (< 26 VDC)
- 3. AS-Interface network segment connection points.
- >4. Earth ground connection point. Do not use as a data cable shield termination point.

StoneL Corporation Phone: (218) 739-5774 · Toll-free: (800) 843-7866 · Website: www.stonel.com