

Input/output modules

Model number
IM461054A
IM465015A (DIN)



Input/externally powered output module

This I/O module is designed to function as a Foundation Fieldbus node with termination points for connecting switches/sensors, as well as output devices such as solenoid valves and relays. This module is also capable of reading one (1) analog input and controlling one (1) analog output via Foundation Fieldbus. This device requires external 24VDC power supply.

Inputs and outputs

- Two (2) discrete inputs
- Two (2) discrete outputs
- One (1) analog input (4-20mA)
- One (1) analog output (4-20mA)

Features


- Pre-determined output fail state



Specifications


Discrete inputs	(2) 6.5 VDC < .045 mA, must be low power dry contact capable of operating at < .045 mA @ 6.5 VDC or solid state pnp capable of operating at 6.5 VDC and < 1 mA
Discrete outputs	(2) 24 VDC (4 watts total power)
Analog input	(1) analog (4-20 mA) input 10-bit resolution (0.1%)
Analog output	(1) analog (4-20 mA) output 10-bit resolution (0.1%)
Operating voltage	9 to 32 VDC via Foundation Fieldbus voltage
Current consumption	< 17 mA from Foundation Fieldbus
Indication	(2) LEDs indicate discrete input status (red/green)
External voltage	24 VDC via external power
Data rate	31.25 Kb/s
Dimensions (L, W, H)	75mm, 62mm, 51mm
Housing	Engineered resin
Operating temperature	-40° to +80°C (-40° to +176°F)

Wiring diagram

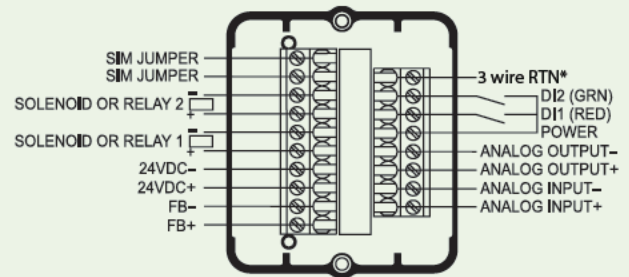

**Only for use with 3 wire PNP sensors*

Dimensions (mm)

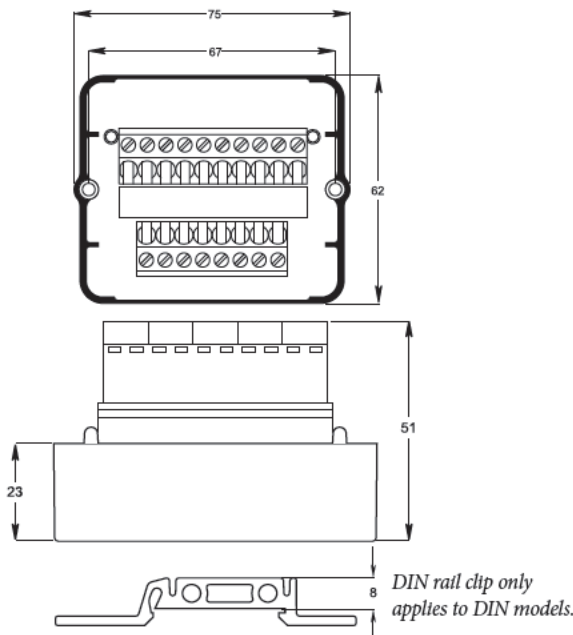



Valmet's professionals
around the world work close
to our customers and are
committed to moving our
customers' performance
forward – every day.

Valmet Flow Control Oy

Vanha Porvoontie 229
01380 Vantaa, Finland
flowcontrol@valmet.com
+358 10 417 5000
valmet.com/flowcontrol

**Valmet Flow Control Inc.
Stonel product center**

26271 US Hwy 59, Fergus Falls, MN 56537 USA.
Tel. +1 218 739 5774.
sales.stonel@valmet.com
valmet.com/flowcontrol

