

Terminator

Model number
AC461111A



This Foundation Fieldbus terminator contains all of the components required for terminating a Foundation Fieldbus segment. This device is designed to be very compact and easy to use. The terminator is used to prevent reflections on the Fieldbus cable resulting from the ends of the segment. One terminator should be located at each end of the Fieldbus segment.


Features

- 100 ohm resistor
- 1 microfarad capacitor
- Compact, moisture resistant shell




Specifications	
Resistor	100 ohms +/-1%
Capacitor	1 micro farad +/- 5%
Housing material	ABS
Pins	2 (not polarity sensitive)
Dimensions (L, W, H)	28mm, 14mm, 14mm
Operating temperature	-40°C to + 80°C (-40°F to 176°F)


Schematic drawing

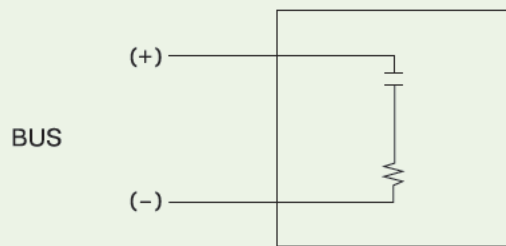

Wiring diagram

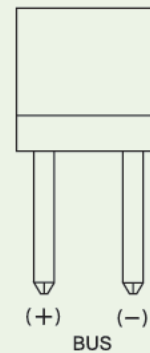

Dimensions (mm)

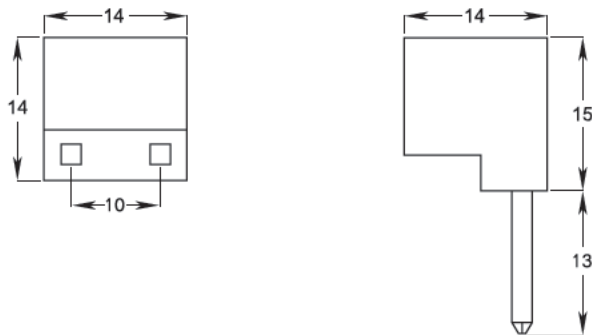



Valmet's professionals around the world work close to our customers and are committed to moving our customers' performance forward – every day.

Valmet Flow Control Oy

Vanha Porvoontie 229
01380 Vantaa, Finland
flowcontrol@valmet.com
+358 10 417 5000
valmet.com/flowcontrol

**Valmet Flow Control Inc.
Stonel product center**

26271 US Hwy 59, Fergus Falls, MN 56537 USA.
Tel. +1 218 739 5774.
sales.stonel@valmet.com
valmet.com/flowcontrol

