



Neles Easyflow[™] high capacity solenoid valves Series DAQ and VAQ version 2

3/2 way solenoid valve

Model no. DAQ213 / DAQ313 / DAQ413

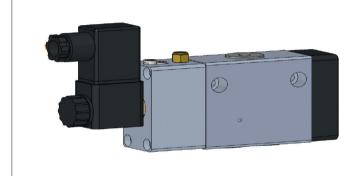





Features

- Mounts in any position
- High flow solenoid valves
- Helping piston improves valves performance & reliability
- Solenoid capable of turning 360°
- Solenoid continuous duty rated
- Noiseless performance
- Available in BSP & NPT port thread type
- Spring & air return ensures healthy valve operation in case of spring failure also
- IP certification
- Exd coil certification

Model	DAQ213	DAQ313	DAQ413	
Туре		ol design, sin rn direction c	gle coil, spring & air control valve	
Media	Compressed	air, 25 μm. F unlubrica	iltered, lubricated or ated	
Mounting		oles in housir nounting on	ng, also suitable for manifold	
Orifice (mm)	6.7	10	10	
Flow factor (kv) (L/min)	15	38	38	
Port size	1/4"	3/8"	1/2"	
Operating pressure range (bar)	3-10			
Temperature range (°C)		-10 to 2	70	
Response time at 5 bar	On time 28 ms, Off time 36 ms	()tt time /8 mc		
Manual override type P		ish type & rot	ate to lock	
Operating voltage	AC (50 Hz) - 110, 220	DC	- 12, 24, 48	
Duty cycle		Continu	ous	
Coil insulation class	F			
Valve body MOC	Aluminium			
Seals MOC		NBR		
Coil	Expro	of(Exd) / Wea	atherproof(IP)	

Dimensional drawings

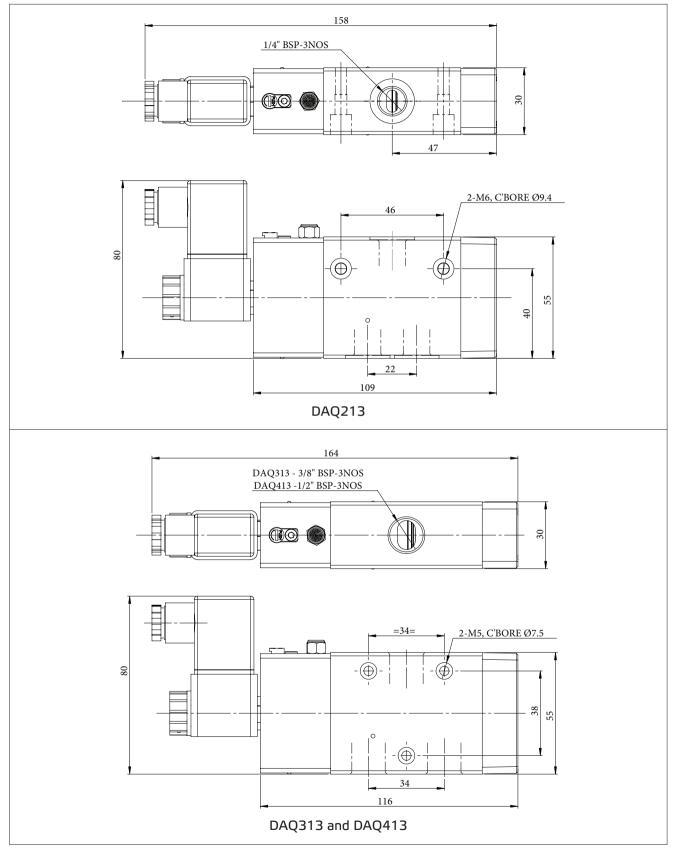


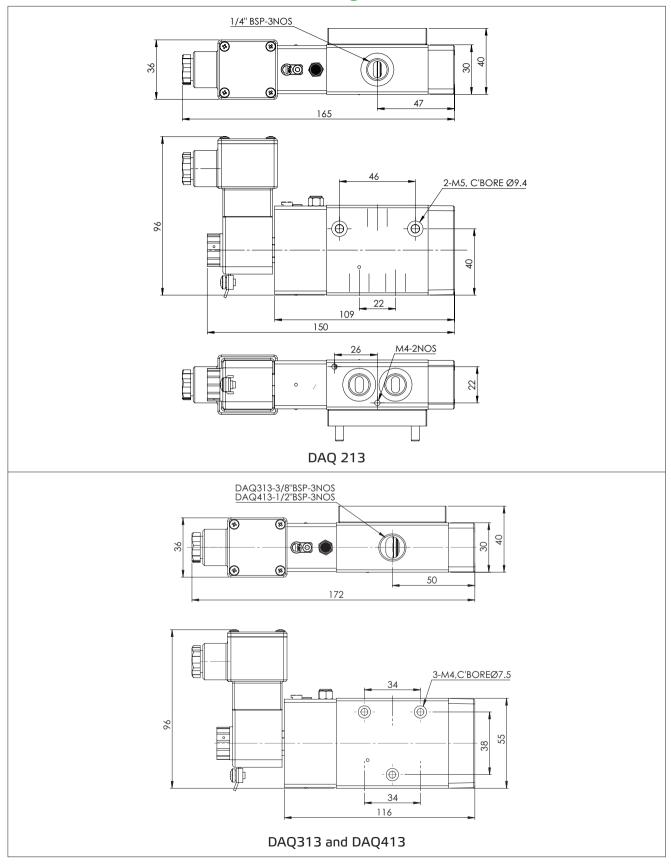

Dimensional drawings with Exd coils

3/2 way solenoid valve

Model no. DAQ214 / DAQ314 / DAQ414

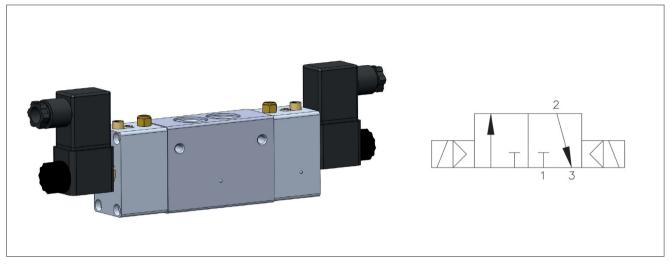



Features

- Mounts in any position
- High flow solenoid valves.
- Helping piston improves valves performance & reliability
- Solenoid capable of turning 360°
- Solenoid continuous duty rated
- Noiseless performance
- Available in BSP & NPT port thread type
- IP Certification
- Exd certification

Model	DAQ214	DAQ314	DAQ414		
Туре	3/2 way spool design, double coil, direction control valve				
Media	Compressed	air, 25 μm. Filte or unlubricated			
Mounting		Through holes in housing, also suitable for mounting on manifold			
Orifice (mm)	6.7	10	10		
Flow factor (kv)	15	38	38		
Port size	1/4"	3/8"	1/2"		
Operating pressure range (bar)		3-10			
Temperature range (°C)		-10 to 70			
Response time at 5 bar	On time 28 ms, Off time 36 ms On time 32 ms, Off time 48 ms				
Manual override type	Push type & rotate to lock				
Operating voltage	AC (50 Hz) - 110, 220	DC – 1	2, 24, 48		
Duty cycle	Continuous				
Coil insulation class	F				
Valve body MOC	Aluminium				
Seals MOC	NBR				
Coil	Exproof	f(Exd) / Weather	rproof(IP)		

Dimensional drawings

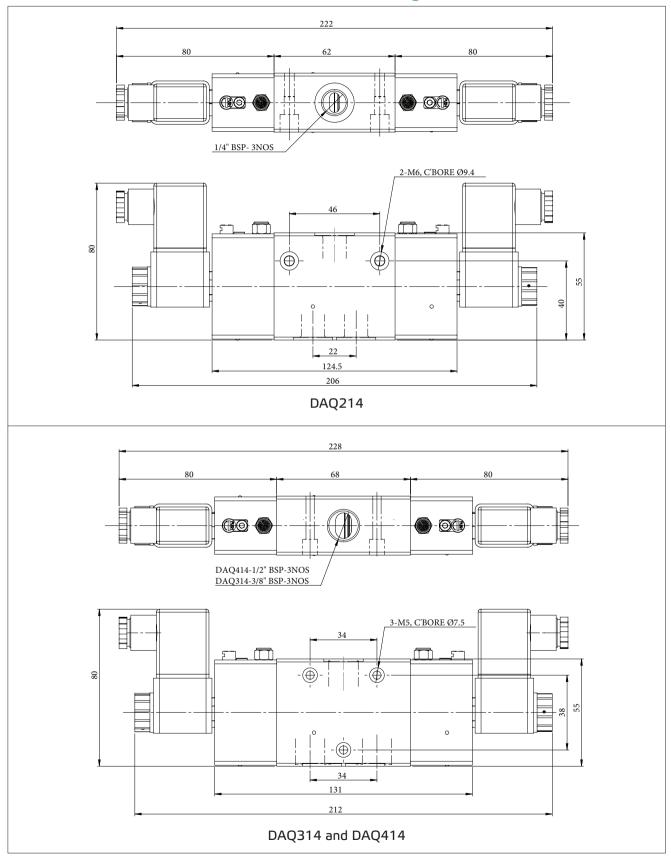


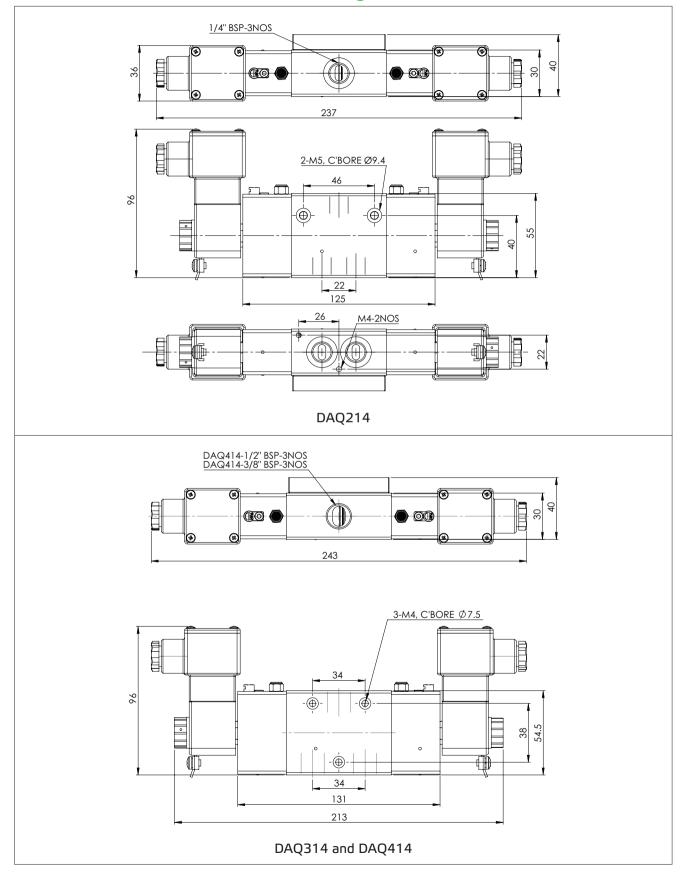

Dimensional drawings with Exd coils

5/2 way solenoid valve

Model no. VAQ213 / VAQ313 / VAQ413

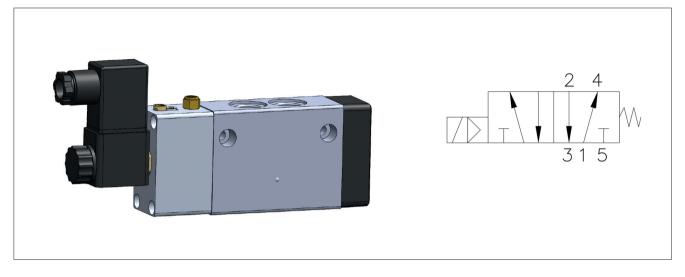



Features

- Mounts in any position
- High flow solenoid valves
- Helping piston improves valves performance & reliability
- Solenoid capable of turning 360°
- Solenoid continuous duty rated
- Noiseless performance
- Available in BSP & NPT port thread type
- Spring & air return ensures healthy valve operation in case of spring failure also
- IP certification
- Exd coil certification

Model	VAQ213	VAQ313	VAQ413	
Туре	5/2 way spool design, double coil, direction control valve			
Media	Compressed	air, 25 μm. Filter or unlubricated		
Mounting	Through hole mc	Through holes in housing, also suitable for mounting on manifold		
Orifice (mm)	6.7	10	10	
Flow factor (kv)	15	38	38	
Port size	1/4"	3/8"	1/2"	
Operating pressure range (bar)	3-10			
Temperature range (°C)		-10 to 70		
Response time at 5 bar	On time 28 ms, Off time 36 ms Off time 48 ms			
Manual override type	Push type & rotate to lock			
Operating voltage	AC (50 Hz) - 110, 220 DC - 12, 24, 48		2, 24, 48	
Duty cycle	Continuous			
Coil insulation class	F			
Valve body MOC	Aluminium			
Seals MOC	NBR			
Coil	Exproof	(Exd) / Weather	proof(IP)	



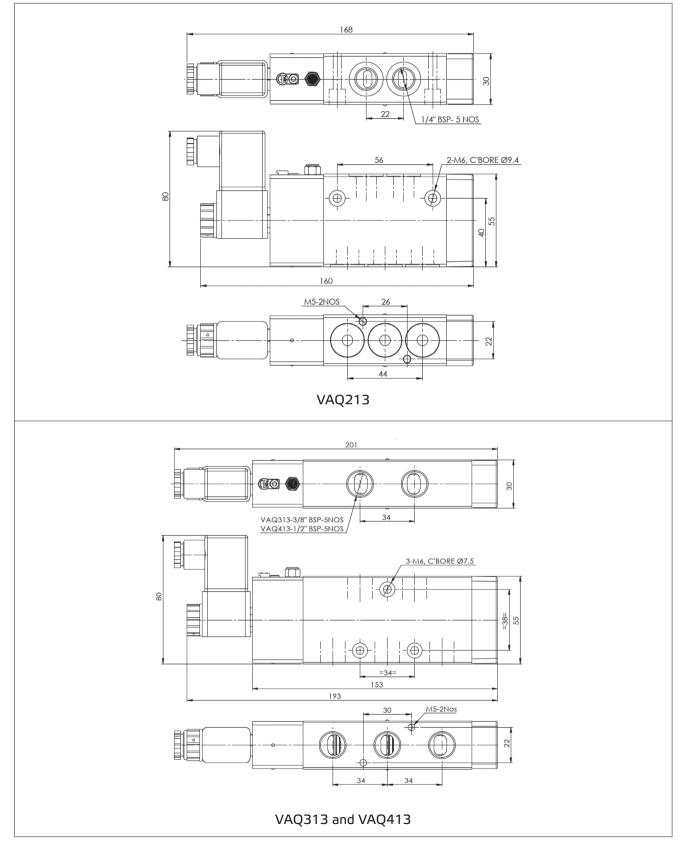


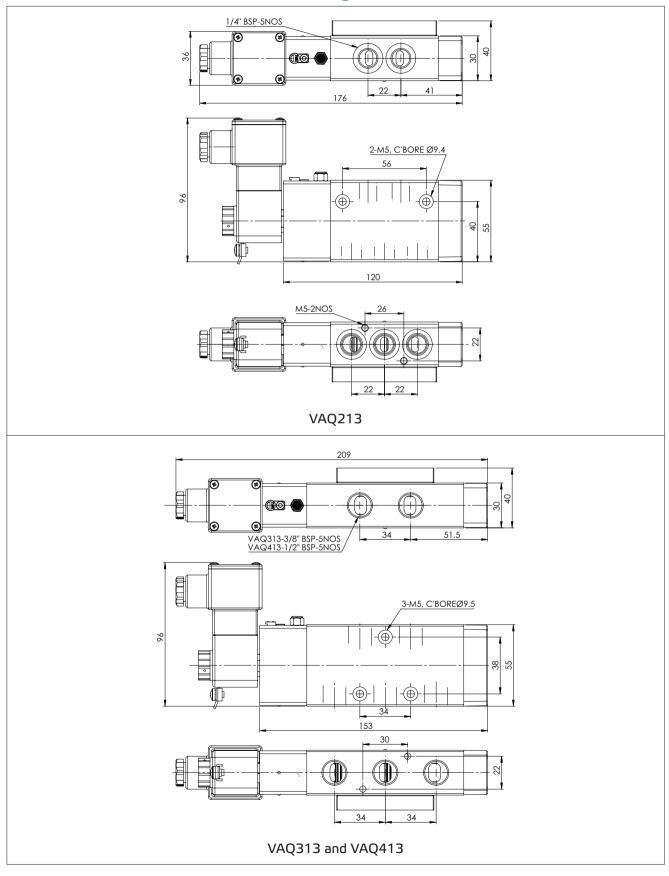

Dimension drawings with Exd coils

5/2 way solenoid valve


Model no. VAQ214 / VAQ314 / VAQ414

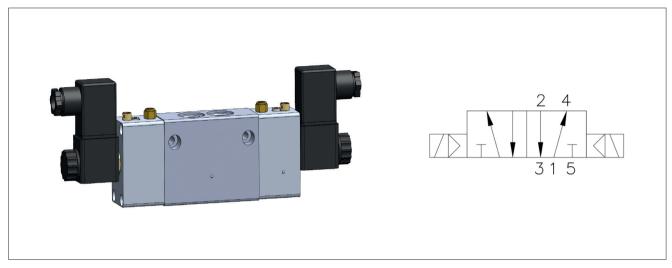


Features

- Mounts in any position
- High flow solenoid valves.
- Helping piston improves valves performance & reliability.
- Solenoid capable of turning 360°
- Solenoid continuous duty rated
- Noiseless performance
- Available in BSP & NPT port thread type
- IP certification
- Exd coil certification

Model	VAQ214	VAQ314	VAQ414	
Туре	5/2 way spool design, single coil, spring & air return direction control valve			
Media		air, 25 µm. Filter or unlubricated		
Mounting		Through holes in housing, also suitable for mounting on manifold		
Orifice (mm)	6.7	10	10	
Flow factor (kv)	15	38	38	
Port size	1/4"	3/8"	1/2"	
Operating pressure range (bar)		3-10		
Temperature range (°C)		-10 to 70		
Response time at 5 bar	On time 28 ms, Off time 36 ms Off time 48 ms			
Manual override type	Push type & rotate to lock			
Operating voltage	AC (50 Hz) - 110, 220	DC – 12	2, 24, 48	
Duty cycle	Continuous			
Coil insulation class	F			
Valve body MOC	Aluminium			
Seals MOC	NBR			
Coil	Exproof(Exd) / Weatherproof(IP)			

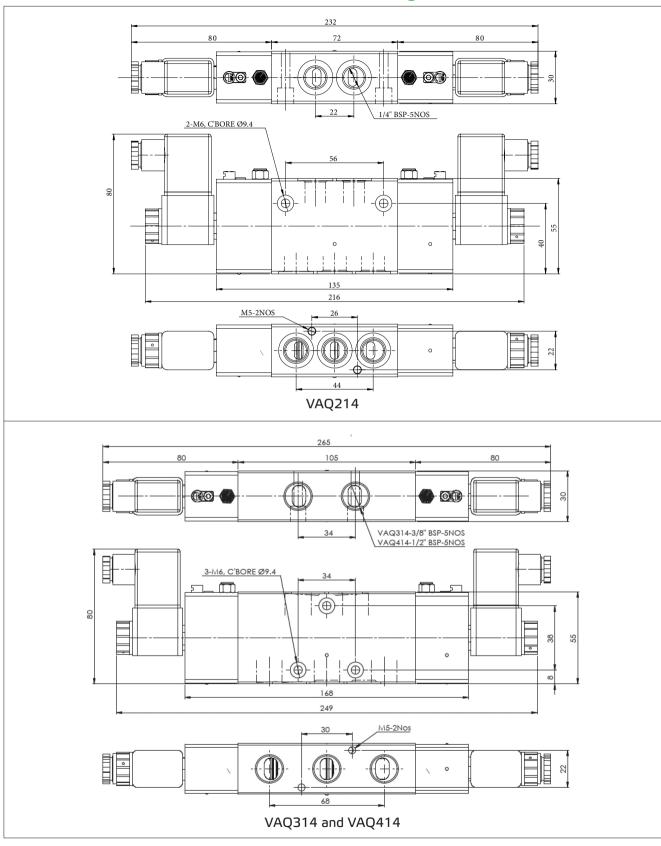

Dimensional drawings

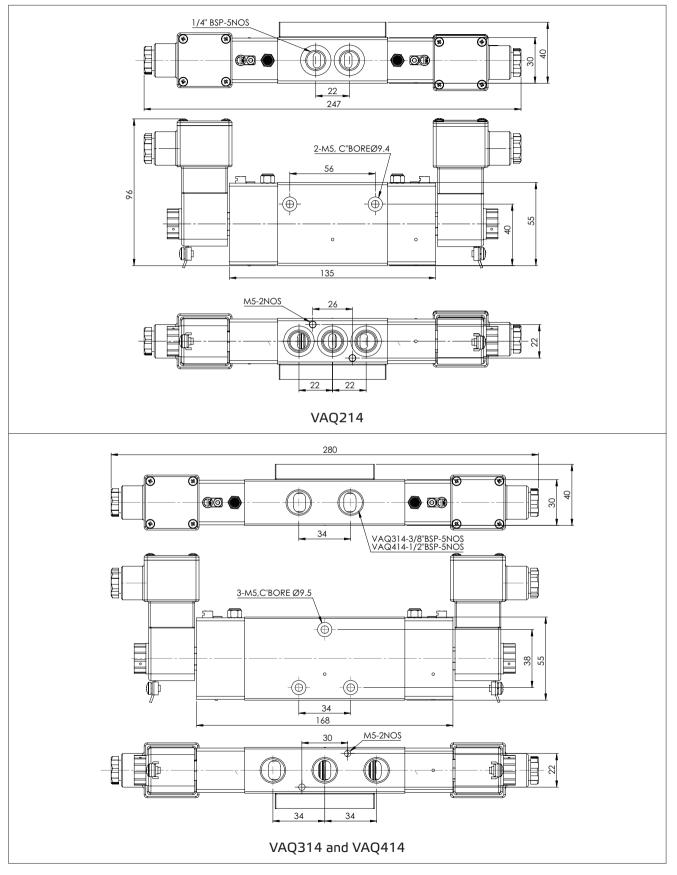

Dimension drawings with Exd coils

How to order

1.	2.	3.	4.	5.	6.	7.	8.	9.
DAQ	2	13	G	0	0	01D0	P1	NN

1.	Valve type
DAQ	3/2 way
VAQ	5/2 way

2.	Port size
2	1/4"
3	3/8"
4	1/2"

5.	Operator
13	Single coil
14	Double coil

4.	Port connrction
G	BSP
R	NPT

7.	Coil
01D0	12VDC
02D0	24VDC
03D0	48VDC
04D0	110VDC
05D0	220VDC
01A0	24VAC
02A0	48VAC
03A0	110VAC
04A0	220VAC
11AL	110VAC-LED
12AL	220VAC-LED
13AL	24VAC-LED
11DL	24VDC-LED

8.	Protection
P1	IP66/67

5.	Body and spool material
0	Aluminium
1	SS316

6.	Seals
0	NBR
1	VITON

ORDERING EXAMPLE:

NILL

NN

EN

1. DAQ-2-13-G-0-0-01D0-P1-NN. This is a 3/2 position single coil solenoid valve with port size of 1/4" BSP connection with Aluminium body having NBR seal and coil voltage of 12VDC,IP Certified valve

Exd certification for coils - only applicable with sign 7. (12, 24, 48VDC), (24, 48, 110, 220, 230VAC) – only sign 8. IP 66 applicable, only applicable with 6. sig NBR

2. VAQ-2-13-G-0-01A0-P1-NN.This is a 5/2 position single coil solenoid valve with port size of 1/4" BSP connection with Aluminium body having NBR seal and coil voltage of 12VDC IP Certified valve Neles Easyflow $^{\mbox{\tiny D4}}$ high capacity solenoid valves, series DAQ and VAQ version 2

Neles Easyflow" high capacity solenoid valves, series DAQ and VAQ version 2 $\,$

Valmet Flow Control Oy Vanha Porvoontie 229, 01380 Vantaa, Finland. Tel. +358 10 417 5000. www.valmet.com/flowcontrol

Subject to change without prior notice. Neles, Neles Easyflow, Jamesbury, Stonel, Valvcon and Flowrox, and certain other trademarks, are either registered trademarks or trademarks of Valmet Oyj or its subsidiaries in the United States and/or in other countries.

