Acceleration sensor

RVT-135 Code: 600-10025

Key features


- Rugged design
- High sensitivity
- Hermetic seal
- Case isolated
- ESD protection
- Reverse wiring protection
- EMI/RFI shielded
- Top exit connector



RVT-135 is a high quality industrial accelerometer for mechanical condition monitoring. It has extended low end frequency response for monitoring of slow turning machinery. It can be used with on-line systems as well as portable data collectors.

RVT-135 is suitable for monitoring of machinery in e.g. following industries:

- Pulp and Paper
- Mining and mineral industry
- · Power generation
- Steel industry

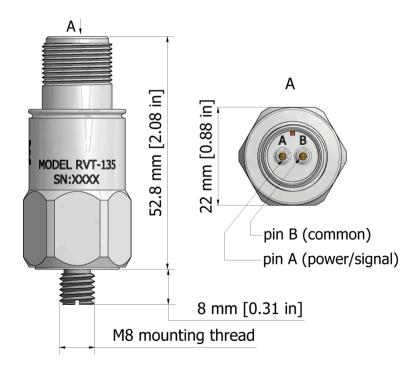



RVT-135 specifications

Dynamic	Sensitivity, ±5%, 25 °C	500 mV/g
•	Acceleration range	10 g peak
	Amplitude nonlinearity	1%
	Frequency response	
	±10%	0.59 000 Hz
	±3 dB	0.214 000 Hz
	Resonance frequency, mounted, nominal	30 kHz
	Transverse sensitivity, max.	5% of axial
	Temperature response	±5%
Electrical	Power requirement	
	Voltage source	1830 VDC
	Bias current	210 mA
	Output impedance, max.	100 Ω
	Bias output voltage	12 VDC
	Grounding	Case isolated, internally shielded
Environmental	Temperature range	-50+120 ºC
	Vibration limit	500 g
	Shock limit, min.	5 000 g
	Sealing	Hermetic
Physical	Sensing element design	PZT ceramic, shear
	Weight	90 g
	Case material	316L stainless steel
	Mounting	M8 integral stud (6 Nm max. torque)
	Output connector	2 pin, MIL-C-5015 style
	Pin A	Signal/power
	Pin B	Common