Acceleration sensor

RVT-105/10 Code: 600-1135

Key features


- Low sensitivity, 10 mV/g
- Rugged design
- Corrosion resistant
- Hermetic seal
- ESD protection
- Reverse wiring protection
- EMI/RFI shielded
- Side exit connector
- Case isolated

RVT-105/10 is a high-quality, low-profile, low-sensitivity industrial accelerometer for mechanical condition monitoring. It can be used with on-line systems as well as portable data collectors.



RVT-105/10 is designed for applications where high acceleration levels can occur, such as gearboxes. Sensor is suitable, for example, for the following industries:


- Pulp and Paper
- Mining and mineral industry
- Power generation
- Steel industry

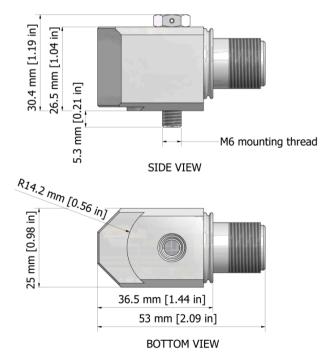




RVT-105/10 specifications

Dynamic	Sensitivity, ±10%, 25 °C	10 mV/g
	Acceleration range	500 g peak
	Amplitude nonlinearity	1%
	Frequency response ±10%	1 5 000 !!-
	±10% ±3 dB	15 000 Hz 0.510 000 Hz
	Resonance frequency, mounted, min.	22 kHz
	Transverse sensitivity, max.	5% of axial
	Temperature response -50 °C +120 °C	-20% +10%
Electrical	Power requirement Voltage source Bias current	1830 VDC 210 mA
	Output impedance, max.	100 Ω
	Bias output voltage	12 VDC
	Grounding	Case isolated, internally shielded
Environmental	Temperature range	-50+120 °C
	Shock limit	5 000 g peak
	Sealing	Hermetic
Physical	Sensing element design	PZT ceramic, shear
-	Weight	145 g
	Case material	316L stainless steel
	Mounting	M6 captive screw
	Output connector Pin A Pin B	2 pin, MIL-C-5015 style Signal/power Common

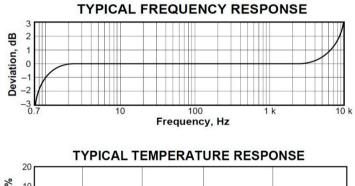

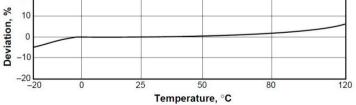



For more information, contact your local Valmet office. www.valmet.com

Specifications in this document are subject to change without notice. Product names in this publication are all trademarks of Valmet Corporation.