

## Drop connectors

**Model number**

**DR461110A**

Passive

**DR465003A (DIN)**

Passive

**DR461057A**

Protected

**DR465006A (DIN)**

Protected



### Multi-drop connector/device coupler

Drop connectors for Foundation Fieldbus/Profibus-PA networks provide a reliable, safe method of connecting slave devices to the bus cable. Protected drop connectors limit the current passing from the bus to the drop leg to prevent fault conditions on the drop from affecting the bus.

**Passive (2 drops)**

- 8 amp capacity
- Direct mount or DIN rail mount available

**Protected (1 drop)**

- 8 amp capacity on bus trunk line
- Limits currents on drop leg to protect against short circuits without affecting bus performance
- LED indicates drop fault
- Automatically resets when drop fault is cleared



Passive




Protected

Specifications	
Maximum voltage	35 VDC
Maximum current (trunk)	8 amps
Voltage drop (trunk)	Negligible
Voltage drop (drop)	Passive: negligible Protected: < 1V
Trip current (drop)	Passive: no trip current Protected: 40 mA
Holding current (after trip)	Protected: 28 mA
Reset current level	Protected: current falls below 28 mA
Maximum devices per drop	Passive: no limit Protected: 1
Current consumption	None
Dimensions (L, W, H)	Passive: 75mm, 36mm, 40mm Protected: 75mm, 26mm, 40mm
Housing	Engineered resin
Operating temperature	-40° to +80°C (-40° to +176°F)




### Dimensions (mm)

**Passive**

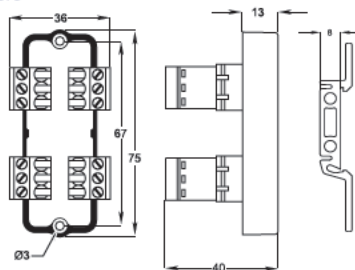

*DIN rail clip only applies to DIN models.*


**Protected**




*DIN rail clip only applies to DIN models.*

### Schematic drawings

**Passive**

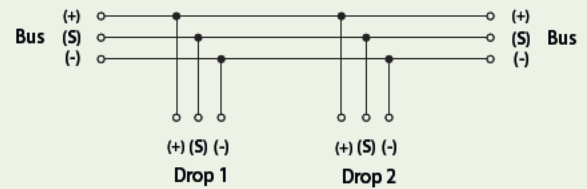


**Protected**

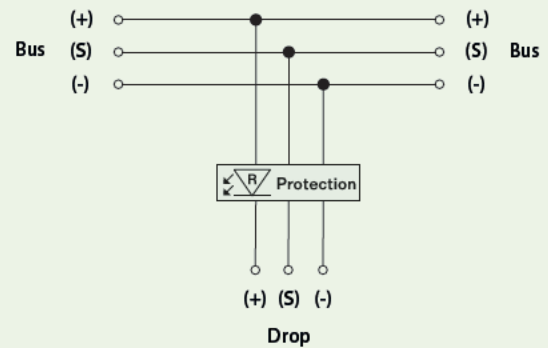


### Wiring diagrams

**Passive**



**Protected**

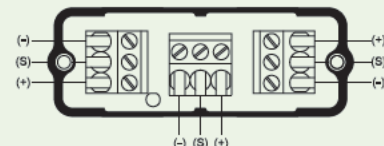



Valmet's professionals around the world work close to our customers and are committed to moving our customers' performance forward – every day.

**Valmet Flow Control Oy**

Vanha Porvoontie 229  
01380 Vantaa, Finland  
flowcontrol@valmet.com  
+358 10 417 5000  
valmet.com/flowcontrol

**Valmet Flow Control Inc.  
Stonel product center**

26271 US Hwy 59, Fergus Falls, MN 56537 USA.  
Tel. +1 218 739 5774.  
sales.stonel@valmet.com  
valmet.com/flowcontrol

