

# Neles™ NDX™ intelligent valve controller, standard model

Neles NDX Standard model is the next generation intelligent valve controller working on all type of control valves and in all industry areas. It guarantees end product quality in all operating conditions with incomparable performance, unique diagnostics, and years of reliable service. The NDX is a future-proof investment with life-time support for asset management.

## Total cost of ownership

- Fast and reliable installation process
- Low energy and air consumption
- Easy to use diagnostics simplify determining when valve maintenance is required
- Inherent high air capacity eliminates additional instrumentation
- One positioner that fits to all control valves; small and big, rotary and linear, single and double acting
- Available for intrinsically safe and flameproof applications

## Key features

- Reliable and robust design
- Industry leading pneumatic capacity
- Benchmark control performance
- Simple and fast installation and commissioning
- Valve stroke length up to 220 mm
- Local / remote operation
- Wide language support
- Expandable architecture
- HART 7 (as standard) or HART 6
- Premium device diagnostics including:
  - Self-diagnostics
  - Online diagnostics
  - - History trends
  - Performance diagnostics
  - Communication diagnostics
  - Extended off-line test capabilities
  - Performance view
  - Online Valve Signature
- Worldwide support for hazardous area approvals

## Options

- Internal position transmitter
- Digital configurable outputs
- Gauge block

## Minimized process variability

- Linearization of the valve flow characteristics
- Excellent dynamic and static control performance
- Fast response to control signal change
- Accurate internal measurements



## Easy installation and configuration

- Simple / fast configuration and calibration using one of the following:
  - Standard Local User Interface (LUI) accessible without opening the device cover
    - LUI can be rotated according to mounting position
  - Distributed Control System (DCS) asset management program
- Backwards compatible with retrofit kits for easy replacement of Neles NE700 and ND9000 positioners
- Easy retro-fit to an extensive list of 3rd party control valves
- Installation to all common control systems

## Open solution

- Neles is committed to delivering products that freely interface with software and hardware from a variety of manufacturers; NDX is no exception. This open architecture allows the NDX to be integrated with other field devices to give an unprecedented level of controllability.
- FDT and EDD based multi-vendor support configuration
- Support files for NDX are available from [www.valmet.com/ndx](http://www.valmet.com/ndx)

## NDX mounting on actuators and valves

- Supports all single and double acting pneumatic actuators
- Both rotary and linear valves (up to 220 mm stroke)
- Guided startup and automatic/manual calibration

## Product reliability

- Designed to operate in harsh environmental conditions
- Rugged modular design
- Excellent temperature characteristics
- Vibration and impact tolerant
- IP66 enclosure
- Protected against humidity
- Resistant to dirty air
- Wear resistant and sealed components
- Fully contactless and maintenance free position measurement

## Predictive maintenance

- Easy access to collected data with any FDT/DTM software and drivers
- Intelligent diagnostics analysis to visualize control valve health and performance
- Patented on-line valve signature
- Logical trend and histogram collection
- Diagnostics collected continuously while the process is running
- Extensive set of off-line tests with accurate key figure calculations
- Clear notifications with on-line alarms

## Technical description


The NDX is a 4–20 mA powered microcontroller based intelligent valve controller. The device contains a local user interface enabling configuration and operation without opening the device cover. Configuration and operation can also be made remotely by PC with asset management software connected to the control loop via HART communication.

After connections of electric signal and pneumatic supply, the micro controller continuously reads measurements:

- Input signal
- Valve position with contactless sensor
- Actuator pressure
- Supply pressure
- Device temperature

Advanced self-diagnostics guarantee that all measurements operate correctly.

Powerful microcontroller calculates a control signal for I/P converter. I/P converter (prestage) controls the operating pressure to the pneumatic relay (output stage). Pneumatic relay moves and actuator pressure changes accordingly. The changing actuator pressure moves the control valve. The position sensor measures the valve movement. The control algorithm modulates the I/P converter control signal until the control valve position is according to the input signal.

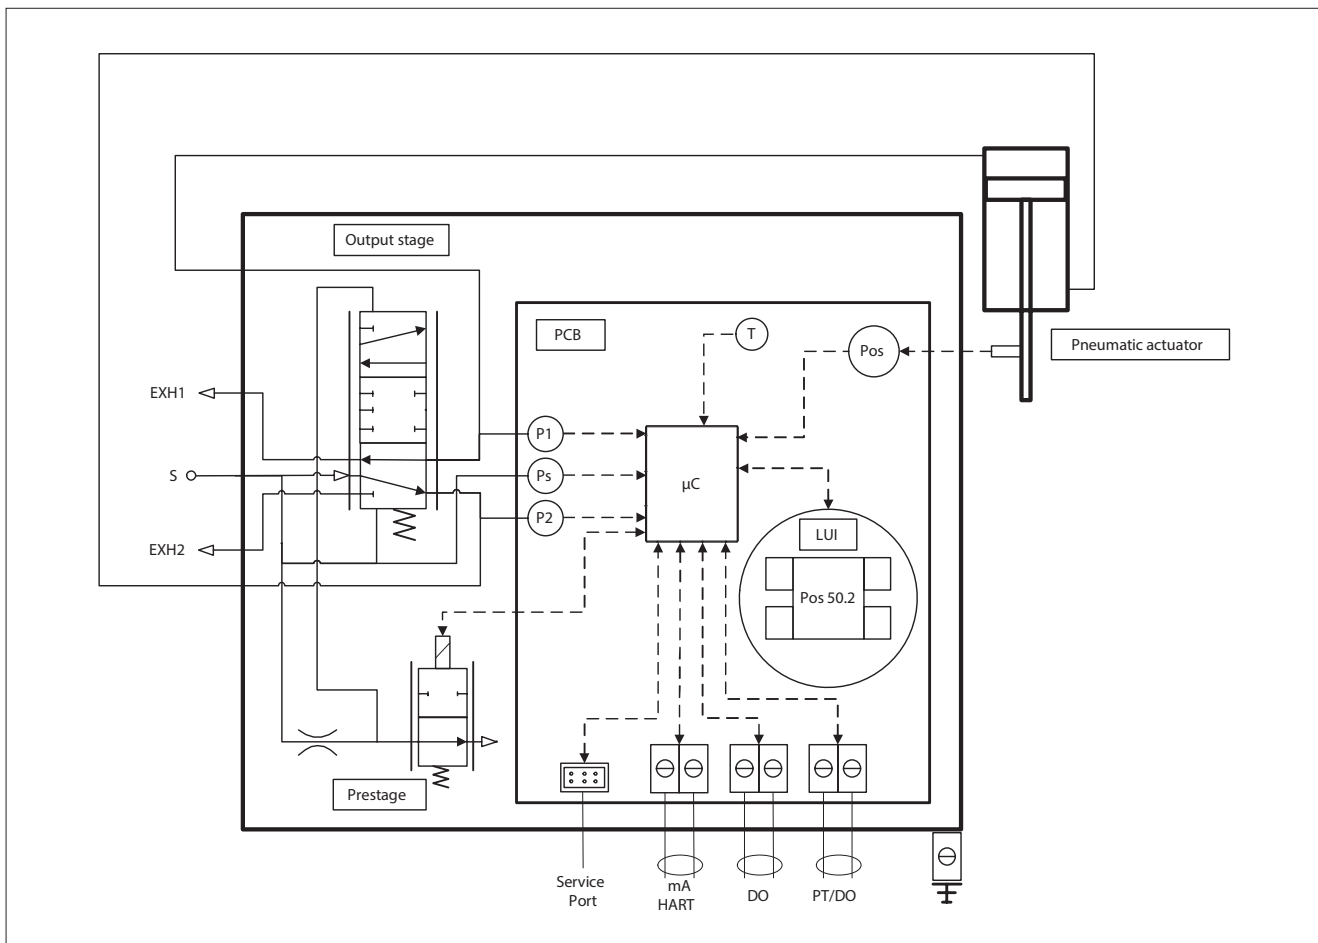

## Technical specifications NDX intelligent valve controller

### General

Loop powered 4-20 mA, no external power supply required. Suitable for linear and rotary valves. Actuator connections in accordance with VDI/VDE 3845 and IEC 60534-6 standards.

Action: Single acting or double acting, direct or reverse

Travel range: Linear (standard): 5-120 mm / 0.2-4.7 in  
Linear (long range): 120-220 mm / 4.7-8.6 in  
Rotary: 30-160 degrees

### Environmental influence

Standard temperature range: -40° – +85 °C / -40° – +185 °F

Influence of temperature on valve position:  
Rotary: 0.5 % / 10 °C  
Linear: 0.1 mm / 10 °C

LUI usable range: -25°C ... +65°C

Temperature cycling/Dry heat:  
Acc. to IEC 60068-2-2

Humidity Limits:  
Acc. to IEC 61514-2

Magnetic Fields:  
Negligible at 30 A/m  
Acc. to IEC 61000-4-8

Vibration:  
Tested acc. to ANSI/ISA-75.13.01-2013

### Electromagnetic protection

Emission acc. to IEC 61000-6-4  
Immunity acc. to EN 61000-6-2

### Enclosure

Housing material: Epoxy coated anodized aluminum alloy, EN1706 AC - AlSi12 (b), copper free, Cu content max 0.4 %

Cover material: Standard - polycarbonate  
Explosion Proof - same as housing and glass window

Magnet holder: Linear, standard: Glass fiber reinforced polyamide, PA66GF20  
Linear, long range: Anodized aluminum alloy  
Rotary: Anodized aluminum alloy

Protection class: IP66, NEMA 4X  
IP67 for storage and transport

Pneumatic ports:  
Supply air: 1/4 NPT, G1/4 with additional block  
Actuator: 1/4 NPT, G1/4 with additional block  
Exhausts: 3/8 NPT, G3/8 with additional block  
Cable entry: 2 pcs. 1/2 NPT (M20 with adapter)  
Weight: 2.8 kg / 6.2 lbs (Standard)  
3.8 kg / 8.4 lbs (Explosion proof)

### Pneumatics

Supply pressure: 1.4–8 bar / 20–116 psi (single acting)  
2–8 bar / 29–116 psi (double acting)

Supply media: Air, nitrogen, sweet natural gas

Effect of supply pressure on valve position:  
< 0.1 % at 10 % difference in inlet pressure

Air quality:  
Acc. to ISO 8573-1

Solid particles:  
Class 7 (40 µm filtration)

Humidity:  
Class 1 (at minimum dew point 10 °C / 18 °F below minimum temperature is required)

Oil class:  
3 (or < 1 ppm)

Air capacity<sup>1</sup>: 80 Nm<sup>3</sup> / h / 47.1 scfm

Air consumption in steady state position<sup>1</sup>:  
0.1 Nm<sup>3</sup> / h / 0.06 scfm

<sup>1</sup> rated at 4 bar / 60 PSI supply pressure

### Electronics

HART  
Supply power: Loop powered, 4–20 mA  
Min. signal: 3.8 mA  
Min. control signal: 3.95 mA  
Current max: 120 mA  
Load voltage: 9.7 VDC at 20 mA  
9.0 VDC at 4 mA

Impedance at 20mA: 485 Ω  
Maximum voltage: 30 VDC  
Rev. polarity protection: -30 VDC  
Over current protection: active over 35 mA  
Wire size: 0.5-2.5 mm<sup>2</sup> (14-20 AWG)

### Performance with moderate constant-load actuators

Dead band: ≤ 0.2 %  
Hysteresis: < 0.5 %  
Linearity error: < 0.5 %  
Long range: < 1.5 %  
Repeatability: < 0.2 %

### Local User Interface (LUI) functions

Accessible with the cover installed.

- PIN code lock to prevent unauthorized / unintended access with the cover installed or permanently (if configured)
- Guided-startup wizard
- Language selection; English, Chinese, Spanish, Italian, French, Korean, German, Turkish, Dutch, Portuguese, Japanese (pending)
- Calibration: Automatic / Manual / 1-Point
- 3-point measurement linearization
- Configuration of the control valve
  - Actuator type & valve type
  - Valve dead angle
  - Safety cut-off range
  - Input signal direction
  - Positioner fail action
- Monitoring of valve position, target position, input signal, temperature, supply and actuator pressure
- Manual control of the valve from Local User Interface

Note: LUI usable temperature range is -30° to +60 °C

### Position transmitter (optional)

Output signal: 4–20 mA (galvanic isolation; 600 VDC)  
Supply voltage: 12–30 VDC  
Linearity: < 0.05 % FS  
Temperature effect: < 0.35 % FS  
Failsafe output: 3.5 mA or 22.5 mA  
Maximum external load: 690 Ω for I.S.  
Ex ia IIC T6  
Ui ≤ 28 V

### Digital output (optional)

Output signal: <1.0mA = state '0', >2.2mA = state '1' (NAMUR)

Supply voltage: 5...16VDC

DOs can be used like Namur limit switches or configured to be activated based on any device status.

## Approvals and electrical values

Approval	EC Type examination	Electrical values
II 1 G Ex ia IIC T6...T4 Ga II 1 D Ex ia IIIC T <sub>200</sub> 85 °C...T <sub>200</sub> 115 °C Da IP 66  II 2 G Ex ib IIC T6...T4 Gb II 2 D Ex ib IIIC T <sub>200</sub> 85 °C...T <sub>200</sub> 115 °C Db IP 66	EESF 21 ATEX 018X EN 60079-0:2018 EN 60079-11:2012	Input: U <sub>i</sub> ≤ 28 V, I <sub>i</sub> ≤ 120 mA, P <sub>i</sub> ≤ 1 W, C <sub>i</sub> ≤ 3.7 nF, L <sub>i</sub> ≤ 10.9 μH. PT loop: U <sub>i</sub> ≤ 28 V, I <sub>i</sub> ≤ 120 mA, P <sub>i</sub> ≤ 1 W, C <sub>i</sub> ≤ 3.7 nF, L <sub>i</sub> ≤ 10.9 μH, external load resistance 0–690 Ω DO loop U <sub>i</sub> ≤ 28 V, I <sub>i</sub> ≤ 120 mA, P <sub>i</sub> ≤ 1 W, C <sub>i</sub> ≤ 3.7 nF, L <sub>i</sub> ≤ 10.9 μH
II 3 G Ex ec IIC T6...T4 Gc II 3 G Ex ic IIC T6...T4 Gc II 3 D Ex ic IIIC T85 °C...T115 °C Dc IP 66	EESF 21 ATEX 019X EN 60079-0:2018 EN 60079-11:2012 EN 60079-7:2015/A1:2018	Input: U <sub>i</sub> ≤ 28 V, I <sub>i</sub> ≤ 120 mA, P <sub>i</sub> ≤ 1 W, C <sub>i</sub> ≤ 3.7 nF, L <sub>i</sub> ≤ 10.9 μH. PT loop: U <sub>i</sub> ≤ 28 V, I <sub>i</sub> ≤ 120 mA, P <sub>i</sub> ≤ 1 W, C <sub>i</sub> ≤ 3.7 nF, L <sub>i</sub> ≤ 10.9 μH, external load resistance 0–690 Ω DO loop U <sub>i</sub> ≤ 28 V, I <sub>i</sub> ≤ 120 mA, P <sub>i</sub> ≤ 1 W, C <sub>i</sub> ≤ 3.7 nF, L <sub>i</sub> ≤ 10.9 μH
Ex ia IIC T6...T4 Ga Ex ia IIIC T <sub>200</sub> 85 °C...T <sub>200</sub> 115 °C Da IP 66  Ex ib IIC T6...T4 Gb Ex ib IIIC T <sub>200</sub> 85 °C...T <sub>200</sub> 115 °C Db IP 66	IECEx EESF 21.0014X IEC 60079-0:2017 IEC 60079-11: 2011	Input: U <sub>i</sub> ≤ 28 V, I <sub>i</sub> ≤ 120 mA, P <sub>i</sub> ≤ 1 W, C <sub>i</sub> ≤ 3.7 nF, L <sub>i</sub> ≤ 10.9 μH. PT loop: U <sub>i</sub> ≤ 28 V, I <sub>i</sub> ≤ 120 mA, P <sub>i</sub> ≤ 1 W, C <sub>i</sub> ≤ 3.7 nF, L <sub>i</sub> ≤ 10.9 μH, external load resistance 0–690 Ω DO loop U <sub>i</sub> ≤ 28 V, I <sub>i</sub> ≤ 120 mA, P <sub>i</sub> ≤ 1 W, C <sub>i</sub> ≤ 3.7 nF, L <sub>i</sub> ≤ 10.9 μH
Ex ec T6...T4 Gc Ex ic IIC T6...T4 Gc Ex ic IIIC T85 °C...T115 °C Dc	IECEx EESF 21.0014X IEC 60079-0:2017 IEC 60079-11: 2011 IEC 60079-7:2017	Input: U <sub>i</sub> ≤ 28 V, I <sub>i</sub> ≤ 120 mA, P <sub>i</sub> ≤ 1 W, C <sub>i</sub> ≤ 3.7 nF, L <sub>i</sub> ≤ 10.9 μH. PT loop: U <sub>i</sub> ≤ 28 V, I <sub>i</sub> ≤ 120 mA, P <sub>i</sub> ≤ 1 W, C <sub>i</sub> ≤ 3.7 nF, L <sub>i</sub> ≤ 10.9 μH, external load resistance 0–690 Ω DO loop U <sub>i</sub> ≤ 28 V, I <sub>i</sub> ≤ 120 mA, P <sub>i</sub> ≤ 1 W, C <sub>i</sub> ≤ 3.7 nF, L <sub>i</sub> ≤ 10.9 μH
II 2GD Ex db IIC T6...T4 Gb Ex tb IIIC T85 °C...T113 °C Db	Sira 17ATEX1283X EN 60079-0: 2012 (+A11:2013) EN 60079-1: 2014 EN 60079-31:2014	Input: 4-20 mA, U <sub>i</sub> ≤ 30 V PT loop 4-20 mA, U <sub>i</sub> ≤ 30 V
Ex db IIC T6...T4 Gb Ex tb IIIC T85 °C...T113 °C Db	IECEx SIR 17.0069X IEC 60079-0 : 2011 IEC 60079-1 : 2014-06 IEC 60079-31 : 2013	Input: 4-20 mA, U <sub>i</sub> ≤ 30 V PT loop: 4-20 mA, U <sub>i</sub> ≤ 30 V

Approval	CSA certificate number	Electrical values
Class I, Division 1, Groups A, B, C, and D; T4/ T5/T6 Ex ia IIC T4/T5/T6 Ga Class I, Zone 0 AEx ia IIC T4/T5/T6 Ga Class I, Division 2, Groups A, B, C, and D; T4/ T5/T6 Ex ic IIC T4/T5/T6 Gc Class I, Zone 2 AEx ic IIC T4/T5/T6 Gc	70030683  CSA C22.2 No. 0-M91 CSA C22.2 No. 60079-0:15 CSA C22.2 No. 60079-11:14 UL 60079-0:13 UL 60079-11:13 CAN/CSA 61010-1-12	Input: U <sub>i</sub> ≤ 28 V, I <sub>i</sub> ≤ 120 mA, P <sub>i</sub> ≤ 1.0 W, C <sub>i</sub> ≤ 22 nF, L <sub>i</sub> ≤ 100 μH PT loop: U <sub>i</sub> ≤ 28 V, I <sub>i</sub> ≤ 120 mA, P <sub>i</sub> ≤ 1.0 W, C <sub>i</sub> ≤ 22 nF, L <sub>i</sub> ≤ 100 μH DO loop: U <sub>i</sub> ≤ 16 V, I <sub>i</sub> ≤ 25 mA, P <sub>i</sub> ≤ 100 mW, C <sub>i</sub> ≤ 22 nF, L <sub>i</sub> ≤ 100 μH
Class I, Division 2, Groups A, B, C, and D; T4/ T5/T6 Ex nA IIC T4/T5/T6 Gc Class I, Zone 2 AEx nA IIC T4/T5/T6 Gc	ANSI/UL 61010-1-2012 CSA C22.2 No. 213-17/ UL 121201 CAN/CSA-C22.2 No. 60079- 15:16 UL 60079-15:13	Input: U <sub>i</sub> ≤ 28 V PT loop: U <sub>i</sub> ≤ 28 V DO loop: U <sub>i</sub> ≤ 16 V



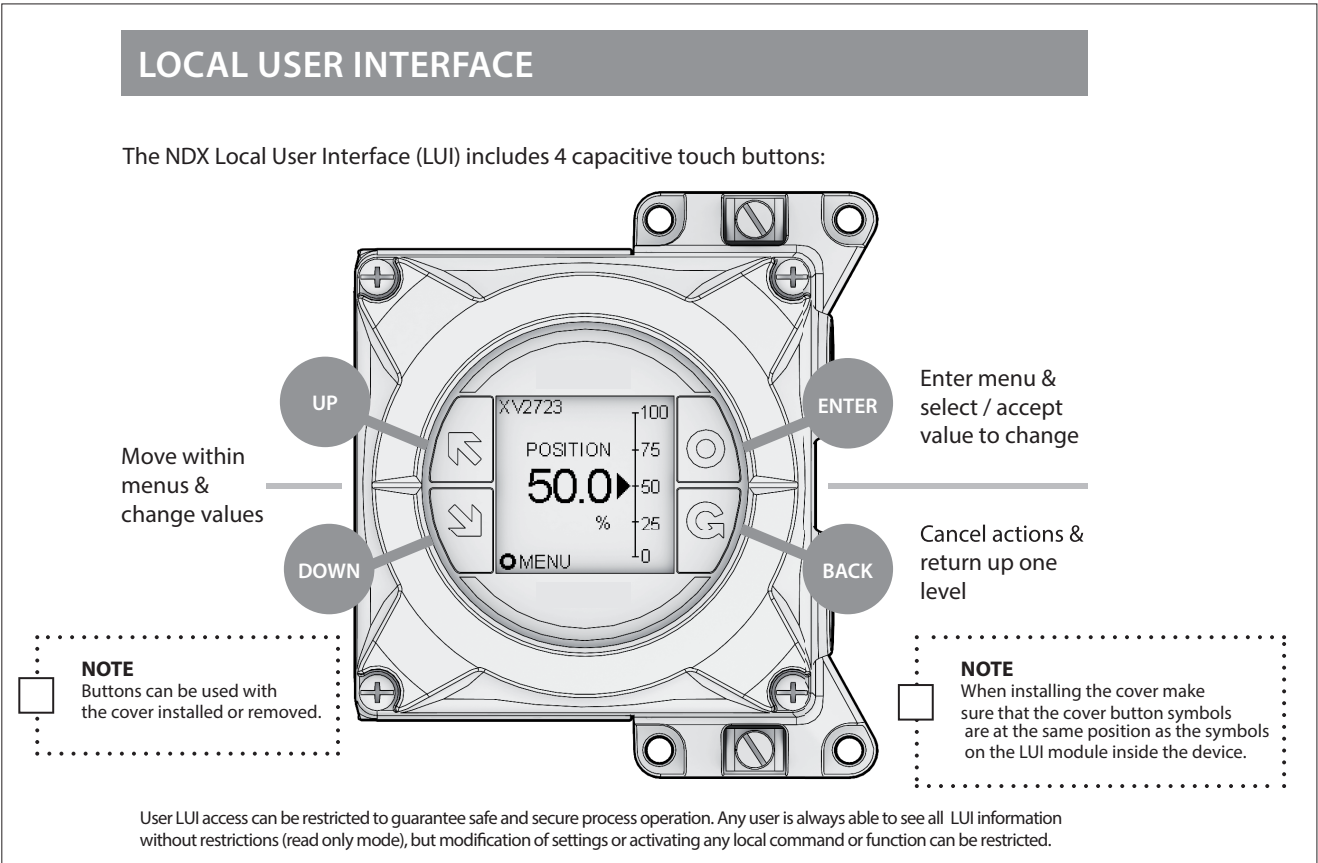


Fig. 1. Local User Interface (LUI) enables easy parameterization and calibration without opening device cover. It also gives real time awareness of control parameters in the device at a glance.


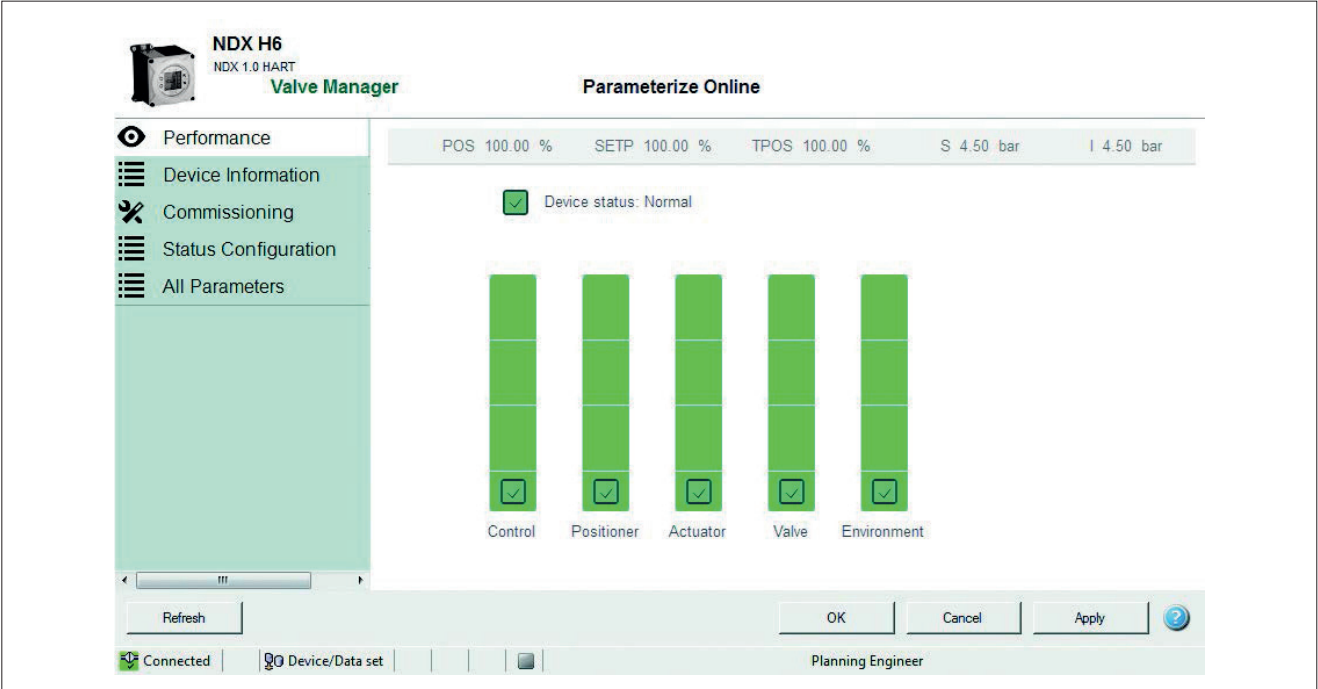



Fig. 2. The Performance View of the Neles Valve Manager graphically displays indexes of the valve, actuator and positioner, as well as indexes of control performance and the application environment. Report will show explanations of the status of each component and guidelines for recommended actions.



## Dimensions

NDX\_511\_



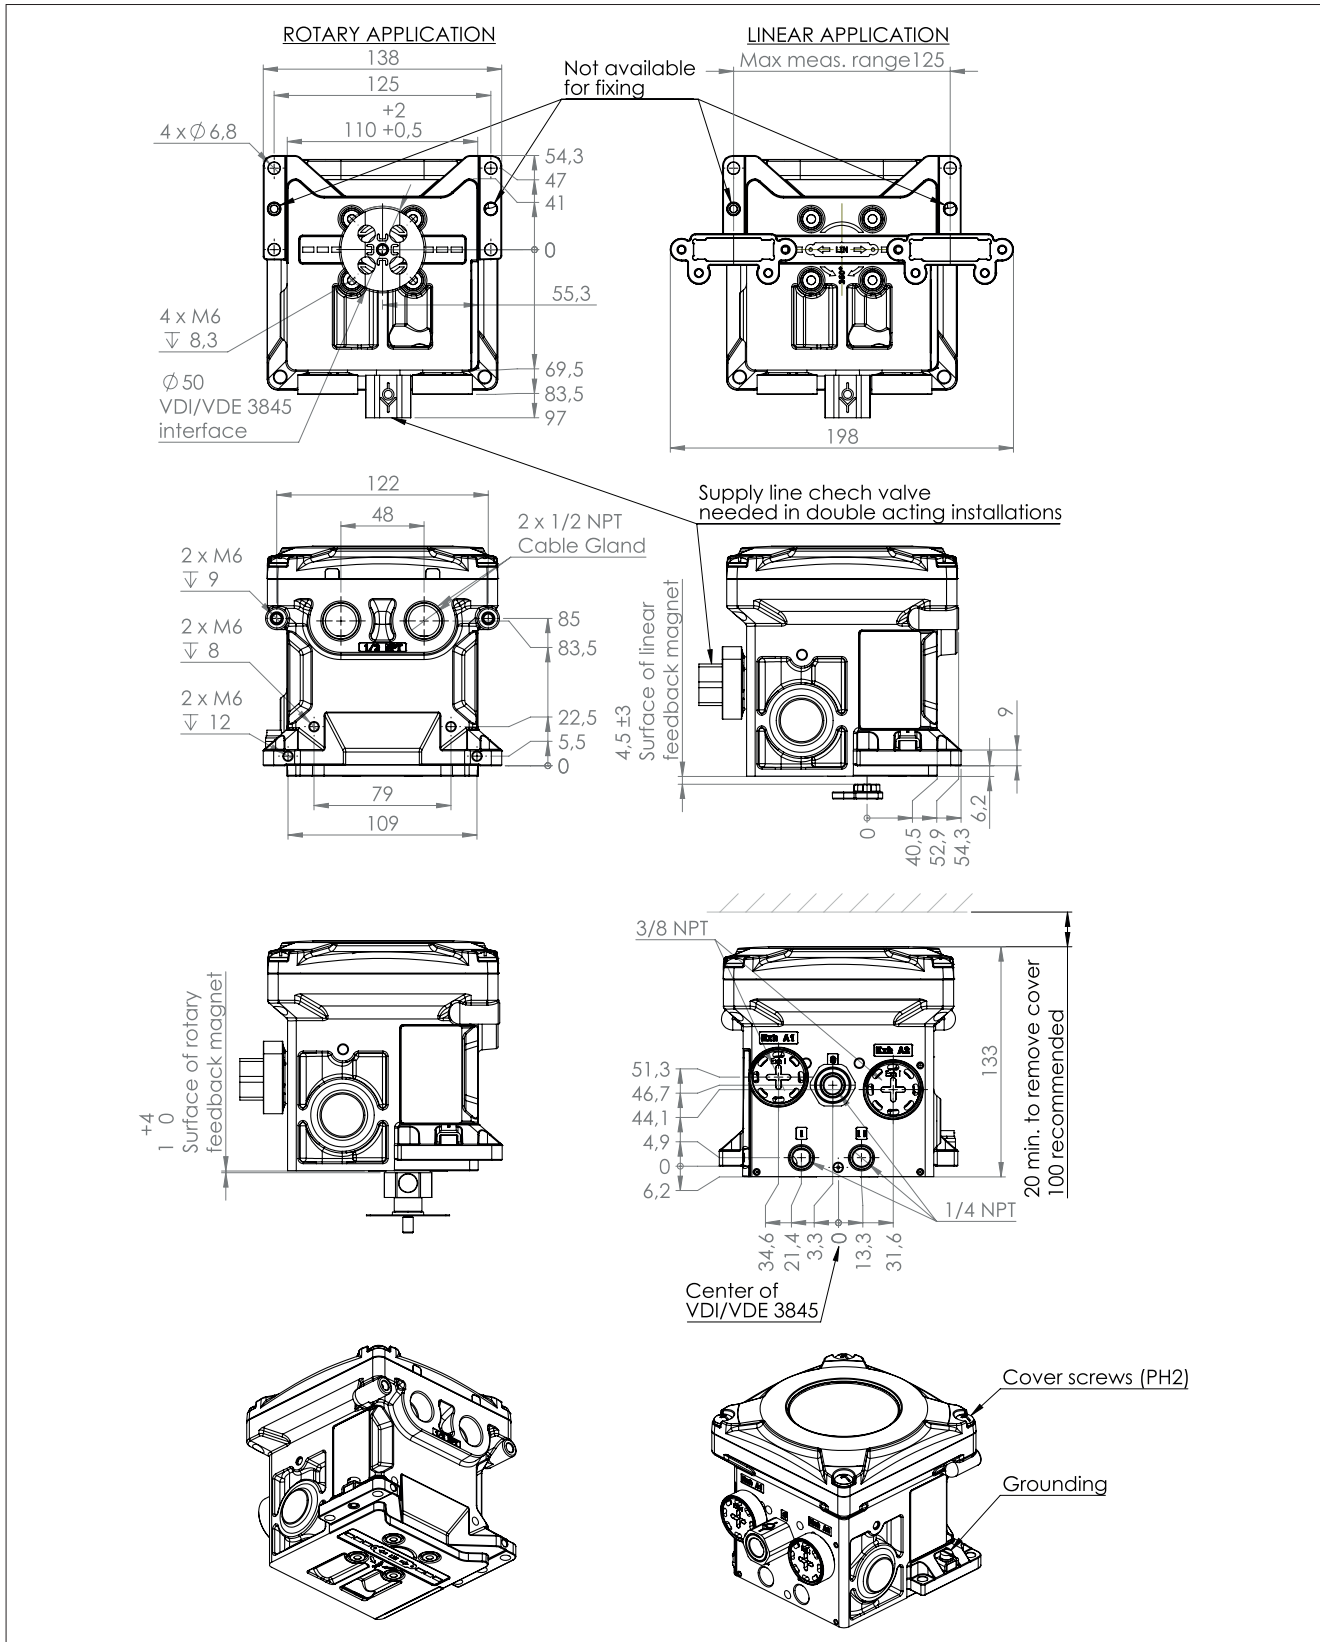


NDX\_512\_


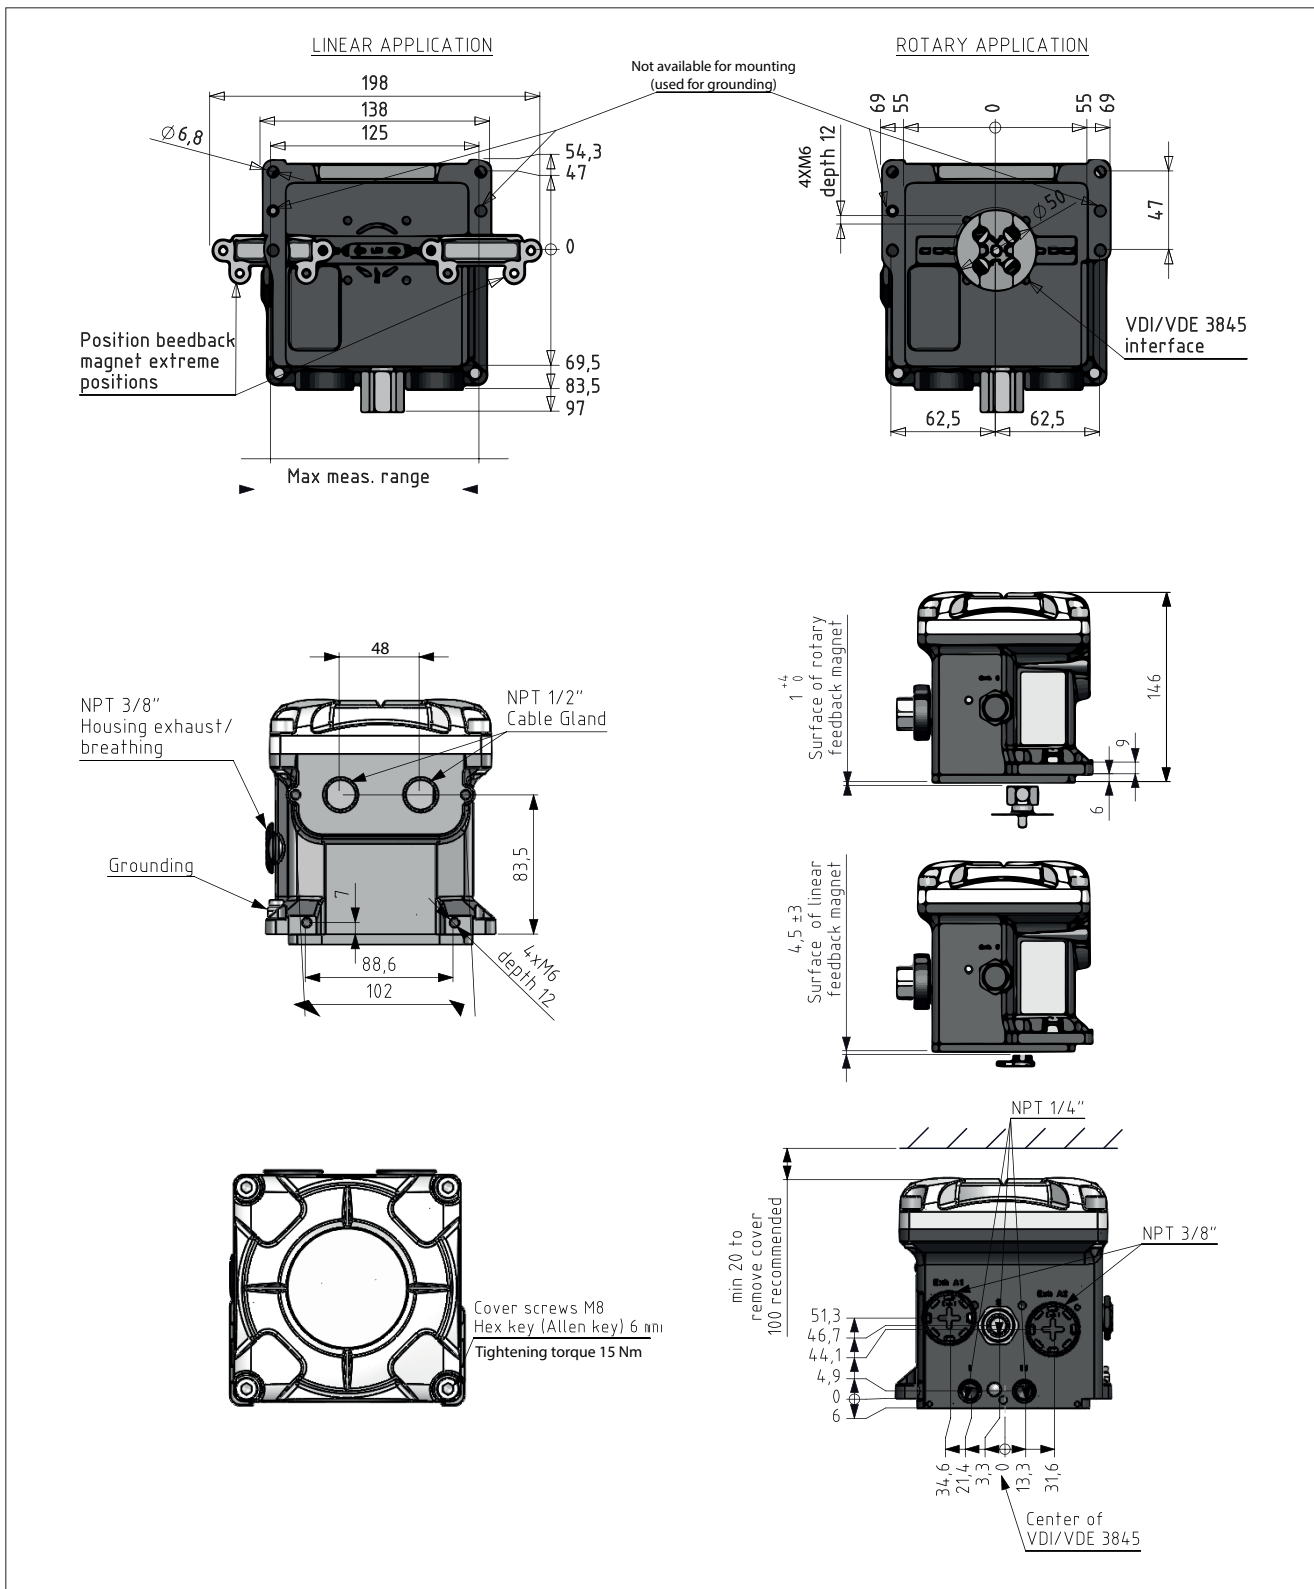


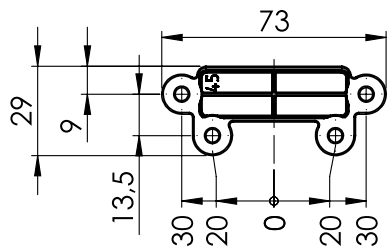



LINEAR



ROTARY

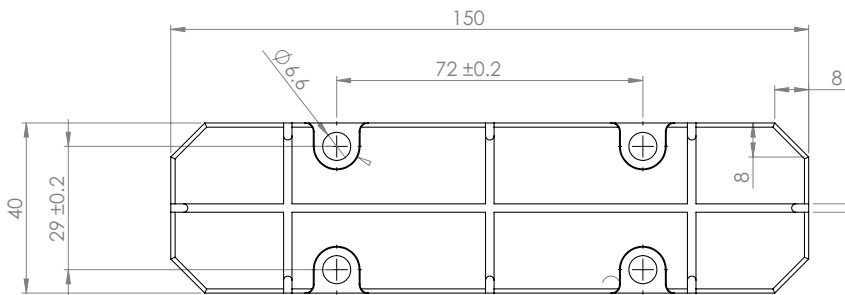


LONG STROKE MAGNET

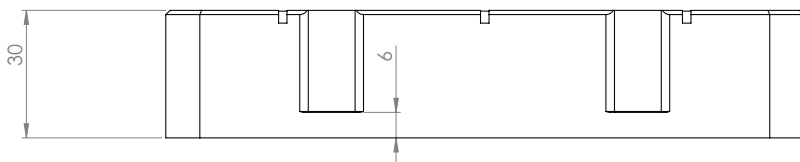




NDX\_512\_ with gauges

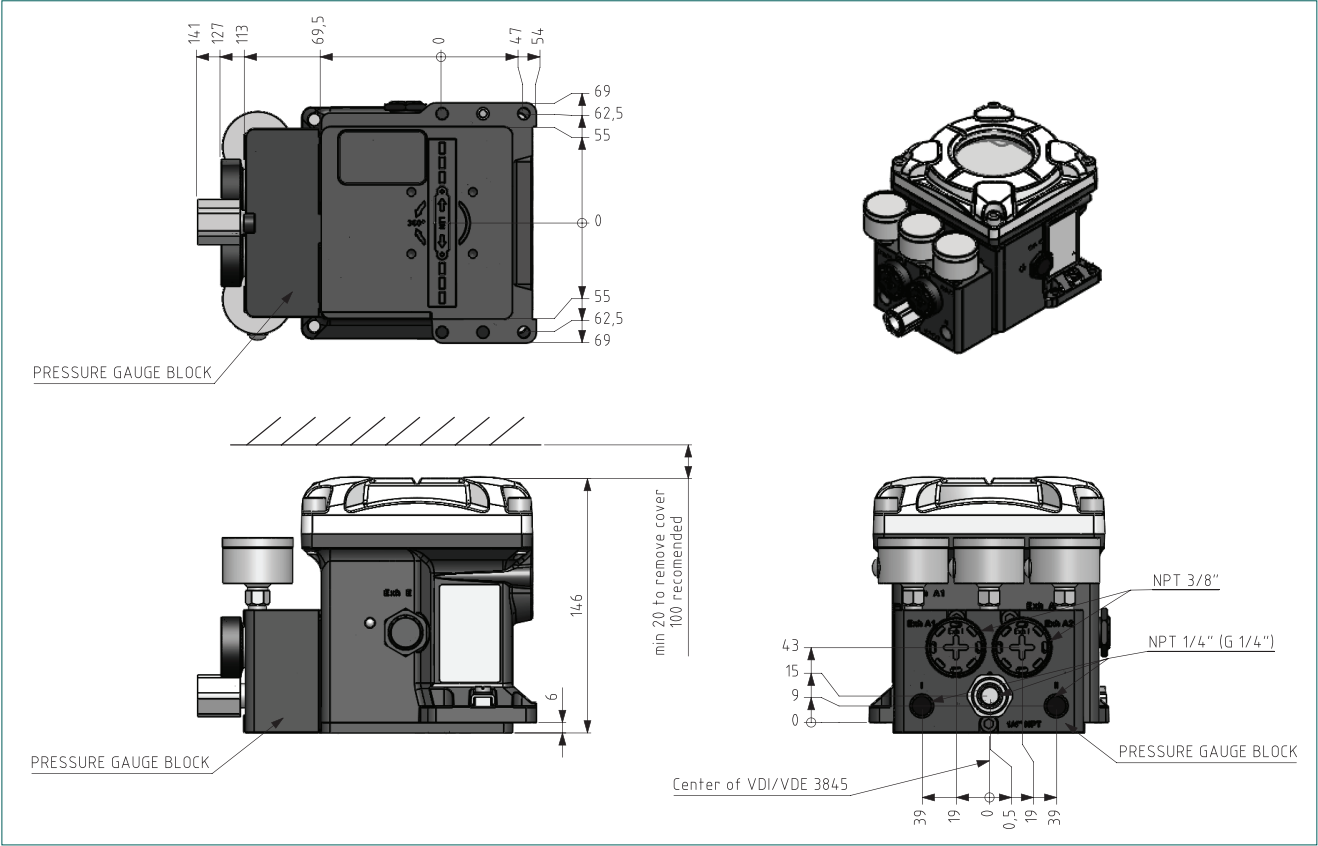

NDX\_511\_ with gauges

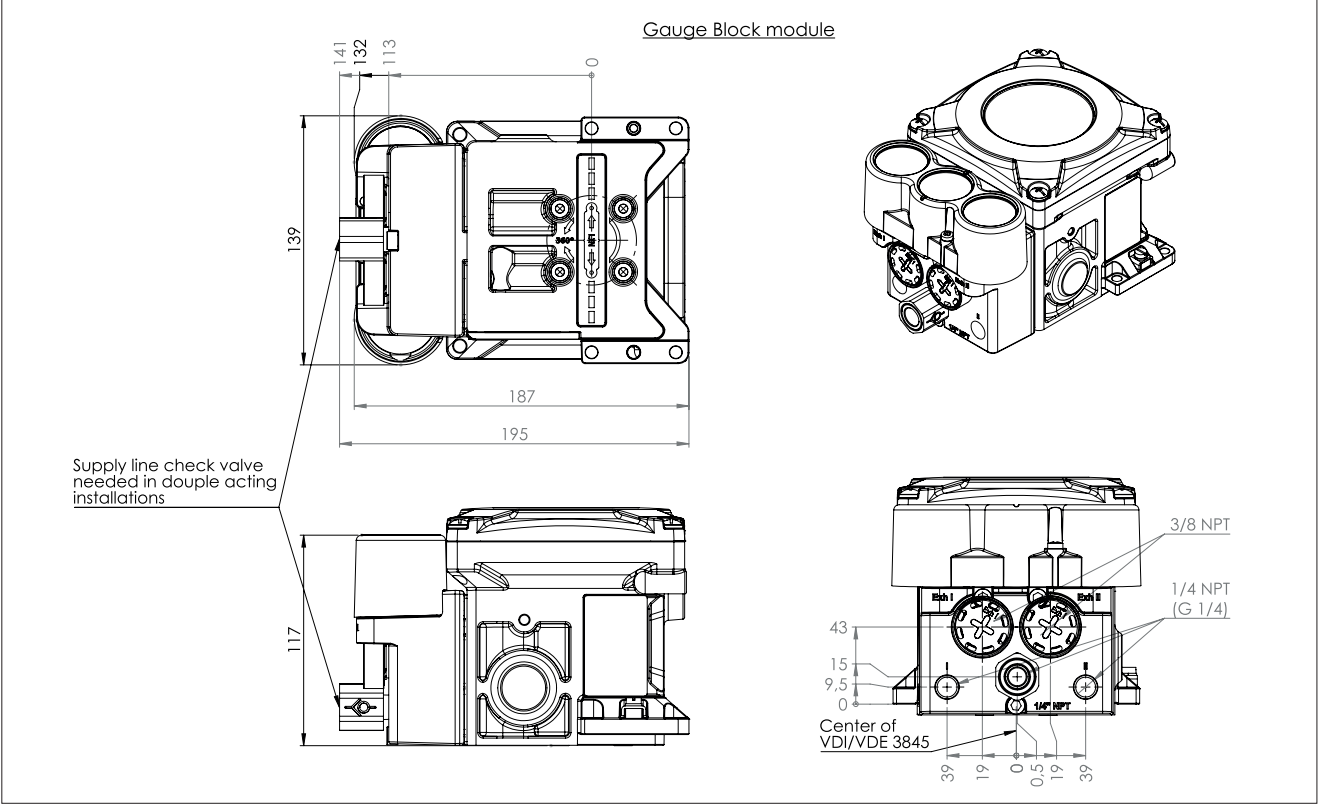

## How to order intelligent valve controller NDX standard model

<b>1. sign</b>																				<b>PRODUCT GROUP</b> Intelligent valve controller series NDX standard model
<b>2. sign</b>																				<b>PNEUMATIC ACTION</b>
1																				Single acting
2																				Double acting.
<b>3. sign</b>																				<b>PNEUMATIC CAPACITY</b>
5																				Normal capacity (80 Nm <sup>3</sup> /h)
<b>4. sign</b>																				<b>FAIL ACTION</b>
1																				Fail safe
<b>5. sign</b>																				<b>ENCLOSURE</b> <b>IP66 / NEMA 4X. 1/2 NPT conduit entry, 2 pcs</b>
1																				Standard - Epoxy coated anodized aluminum housing with polycarbonate cover
2																				Flameproof / Explosion Proof - Epoxy coated anodized aluminum housing and cover
<b>6. sign</b>																				<b>COMMUNICATION / INPUT SIGNAL RANGE</b>
H																				4-20 mA with HART communication
T																				4-20 mA with HART + PT Internal 2-wire (passive) position transmitter.
D																				Analog position feedback signal, output 4-20 mA, supply voltage 12 - 30 V DC 4-20 mA with HART communication + 2 x DO Two digital output (DO) channels, 2-wire type, DC; > 3 mA; < 1 mA, NAMUR NC.
L																				4-20 mA with HART communication + PT + DO Internal 2-wire (passive) position transmitter & one digital output (DO) channel. Analog position feedback signal, output 4-20 mA, supply voltage 12 - 30 V DC. DO, 2-wire type, DC; > 3 mA; < 1 mA, NAMUR NC.
F																				Foundation Fieldbus, Physical layer according to IEC 61158-2 (PENDING) Applicable to 5. sign "1" and 9. Sign "N" or "X"
P																				Profibus PA, Physical layer according to IEC 61158-2 (PENDING) Applicable to 5. sign "1" and 9. Sign "N" or "X"
<b>7. sign</b>																				<b>TEMPERATURE RANGE</b>
G																				General: -40 ... +85 °C / -40 ... +185 °F
<b>8. sign</b>																				<b>SHALL ALWAYS BE HYPHEN OR SLASH</b> This sign is selected automatically based on the other signs. If the device is Ex approved then it will have "-" for Ex electronics module and if not then "/" for non-Ex electronics module.
-																				Electronics module designed for Ex i use Applicable to 5. sign "1" and 9. and 10. sign "N".
/																				Electronics module only for non-Ex applications. Not suitable for I.S. or I/O extension.
<b>9. sign</b>																				<b>APPROVALS FOR HAZARDOUS AREAS 1</b> If approvals are selected for both signs 9. and 10., keep the order shown below, e.g. XE type shall be selected instead of EX type. If there is no need for dual approval, sign 9. or 10. shall be N.
N																				No approval
X																				ATEX and IECEx certifications: II 1 G Ex ia IIC T6...T4 Ga II 1 D Ex ia IIIC T <sub>200</sub> 85 °C...T <sub>200</sub> 115 °C Da IP66 II 2 G Ex ib IIC T6...T4 Gb II 2 D Ex ib IIIC T <sub>200</sub> 85 °C...T <sub>200</sub> 115 °C Db IP66 T4 or T115: -40°C...+80°C; T5 or T100: -40°C...+65°C; T6 or T85: -40°C...+50°C II 3 G Ex ic IIC T6...T4 Gc II 3 G Ex ec IIC T6...T4 Gc II 3 D Ex ic IIIC T85 °C...T115 °C Dc IP66 T4 or T115: -40°C...+85°C; T5 or T100: -40°C...+65°C; T6 or T85: -40°C...+50°C
E																				ATEX and IECEx certifications: II 2GD Ex db IIC T4...T6 Gb Ex tb IIIC T85...T113°C Db T4: -40°C to +85°C; T5: -40°C to +72°C; T6: -40°C to +57°C Applicable to 5. sign "2"
<b>NDX</b>	<b>2</b>	<b>5</b>	<b>1</b>	<b>1</b>	<b>H</b>	<b>G</b>	<b>-</b>	<b>X</b>	<b>N</b>	<b>0</b>	<b>N</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>-</b>	<b>1</b>	<b>2</b>	<b>8</b>	<b>SAMPLE MODEL CODE (char = 21)</b>
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	

											<b>9. sign</b>									<b>APPROVALS FOR HAZARDOUS AREAS 1</b>		
											U									cCSAus certifications: Class I, Division 1, Groups A, B, C, and D; T4/T5/T6 Ex ia IIC T4/T5/T6 Ga Class I, Zone 0 AEx ia IIC T4/T5/T6 Class I, Division 2, Groups A, B, C, and D; T4/T5/T6 Ex ic IIC T4/T5/T6 Gc Class I, Zone 2 AEx ic IIC T4/T5/T6 T4: -40°C to +80°C; T5: -40°C to +65°C; T6: -40°C to +50°C Class I, Division 2, Groups A, B, C, and D; T4/T5/T6, Enclosure Type 4X Ex nA IIC T4/T5/T6 Gc Class I, Zone 2 AEx nA IIC T4/T5/T6 T4: -40°C to +80°C; T5: -40°C to +65°C; T6: -40°C to +50°C		
											C									CCC Ex (China) certifications: Ex ia IIC T4...T6 Ga Ex ib IIC T4...T6 Gb Ex ic IIC T4...T6 Gc T4: -40°C to +80°C; T5: -40°C to +65°C; T6: -40°C to +50°C		
											D									CCC Ex (China) certifications (Ex d): Ex d IIC T4/T5/T6 Gb Ex d tD A21 IP66 T85°C/ T95°C T4 or T113: -40°C...+85°C; T5 or T95: -40°C...+72°C; T6 or T85: -40°C...+57°C Applicable to 5. sign "2"		
											<b>10. sign</b>									<b>APPROVALS FOR HAZARDOUS AREAS 2</b> If approvals are selected for both signs 9. and 10., keep the order shown below, e.g. XE type shall be selected instead of EX type. If there is no need for dual approval, sign 9. or 10. shall be N. No approval		
											N									No approval		
											X									ATEX and IECEx certifications See 9. sign "X" for details		
											E									ATEX and IECEx certifications See 9. sign "E" for details		
											U									cCSAus certifications See 9. sign "U" for details		
											C									CCC Ex (China) certifications: See 9. sign "C" for details		
											D									CCC Ex (China) certifications (Ex d): See 9. sign "D" for details		
											J									Japan certifications: Ex d IIC T6...T4 Gb Ex tb IIIC T85°C...T113°C Db T4: -40°C to +85°C; T5: -40°C to +72°C; T6: -40°C to +57°C Applicable to 5. sign "2"		
											K									KOSHA (Korea) certifications: Ex d IIC T6...T4 T4: -40°C to +80°C; T5: -40°C to +65°C; T6: -40°C to +50°C Ex tD A21 IP66 T* T113°C: -40°C to +85°C, T95°C: -40°C to +72°C, T85: -40°C to +57°C Applicable to 5. sign "2"		
											W									KOSHA (Korea) certifications: Ex ia IIC T6...T4, Ex iaD 20 T85 °C IP66		
											<b>11. sign</b>									<b>PNEUMATIC CONNECTIONS &amp; GAUGES</b>		
											0									Standard, 1/4 NPT, no gauges		
											1									1/4 NPT, gauges (block with 1/4 NPT threads + gauges)		
											2									G1/4, no gauges (block with G1/4 threads)		
											3									G1/4, gauges (block with G1/4 threads + gauges)		
											<b>12. sign</b>									<b>VARIANT</b>		
											N									Neles		
											<b>13. sign</b>									<b>DIAGNOSTICS</b>		
											0									Advanced diagnostics		
											1									Premium diagnostics		
											<b>14. sign</b>									<b>RESERVED</b>		
											0									None		
											<b>15. sign</b>									<b>RESERVED</b>		
											0									None		
											<b>16. sign</b>									<b>RESERVED</b>		
											0									None		
											<b>17. sign</b>									<b>SHALL ALWAYS BE HYPHEN</b>		
											<b>18.-20. sign</b>									<b>PARTNER CODE*</b>		
																			Characters 18 - 20 reserved for partner identification			
											0	7	5				Partner 1					
											1	2	8				Partner 2					
											6	6	8				Partner 3					
																	*) If there is no partner code, there will not be sign 17-20					
<b>NDX</b>	<b>2</b>	<b>5</b>	<b>1</b>	<b>1</b>	<b>H</b>	<b>G</b>	<b>-</b>	<b>X</b>	<b>N</b>	<b>0</b>	<b>N</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>-</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>SAMPLE MODEL CODE (char = 21)</b>		
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20			

## Additional accessories

### CONDUIT ENTRY NIPPLES

CE10	M20x1,5 conduit entry nipples Brass 1/2NPT / M20x1,5 (H5407)
CE52	M20x1,5 conduit entry nipples AlMgSi1 Anodized 1/2NPT / M20x1,5 (H140515)

### CABLE GLANDS

CG51	1/2NPT for NDX (H142731, grey/plastic)
CG8	1/2NPT for NDX (code H6813, blue/plastic)
CG17	1/2NPT for NDX (For armored cable, inner OD 8-12mm / outer OD 11-16mm), Ex d / Ex e, (H7130, BRASS+ENP)

### PRESSURE GAUGES AND CONNECTION BLOCKS

Pressure gauges in modules GB21, GB22, GB24, GB25: scale 0-12 bar/psi/kPa (bar/psi/ kg/cm<sup>2</sup>), AISI304 housing, polycarbonate lens, oil filled. Temperature range -55...+85 °C / -67...+185 °F. Material of pneumatic connection block is AlSiMg, painted grey in blocks GB21, GB22, GB23, GB24, GB25

GB21	Two pressure gauges with connections 1/4 NPT (S, C2). Use with single acting NDX and explosion proof or standard housing (NDX1512_ / NDX1511_). Gauges AISI304, block AlSiMg. H158773
GB22	Three pressure gauges with connections 1/4 NPT (S, C1, C2). Use with double acting NDX and explosion proof or standard housing (NDX2512_ / NDX2511_). Gauges AISI304, block AlSiMg. H158774
GB23	Connection block module without gauges. Converts NDX pneumatic connections to G1/4. Use with both single and double acting NDX and explosion proof or standard housing (NDX1511_ / NDX1512_ / NDX2511_ / NDX2512_). H158775
GB24	Two pressure gauges with connections G1/4 (S, C2). Converts also NDX connections to G1/4. Use with single acting NDX and explosion proof or standard housing (NDX1512_ / NDX1511_). Gauges AISI304, block AlSiMg. H158776
GB25	Three pressure gauges with connections G1/4 (S, C1, C2). Converts also NDX connections to G1/4. Use with double acting NDX and explosion proof or standard housing (NDX2512_ / NDX2511_). Gauges AISI304, block AlSiMg. H158777

### DRIVER SETS FOR ACTUATORS

DS51	Feedback set for NDX on linear actuators. Includes the magnet and a carrier for the magnet. For stroke lengths 5-120 mm. (H137410)
DS52	Feedback set (driver set) for NDX on VDI actuators. Includes the magnet and parts needed for attachment to actuator shaft. (H142751).
DS54	Feedback set (driver set) for NDX on long stroke linear actuators. Includes the rotary-linear adapter (H243234). Requires a separate lever arm, based on the actuator stroke length. Contact Valmet for different options.
DS55	Feedback set for NDX on linear long stroke actuators. Includes the magnet and a carrier for the magnet. For stroke lengths 120-220 mm. (H243231)

### MOUNTING SETS for NDX / Linear Neles VD series actuators

Mounting sets between the NDX valve controllers and linear Neles VD series actuators, including bracket and feedback system.

MS51	Neles VD 25, stroke length 20 mm. AISI 316. (H134414)
MS52	Neles VD 29, stroke length 20-40 mm. AISI 316. (H134388)
MS53	Neles VD 37, stroke length 20-50 mm. AISI 316. (H134392)
MS54	Neles VD 48/55_R, stroke length 40-80 mm. AISI 316. (H134368)

### 3RD PARTY MOUNTING SETS for NDX / Linear actuators

Mounting sets between the NDX valve controllers and 3rd party linear actuators, including bracket and feedback system.

MS61	Mounting set for NDX / linear actuators, attachment face according to IEC 60534-6, stroke length 10-120 mm. AISI316. (H134584)
MS62	Masoneilan 37/38 actuators, sizes 9...15. AISI316. (H138350)
MS63	Masoneilan 87/88 actuators, sizes 6...23. Stroke length 12-64 mm. AISI316. (H134156)
MS64	Fisher 657/667 sizes 30...34, stroke length 19-29 mm. AISI316. (H134202)
MS65	Fisher 657/667 sizes 40...50, stroke length 38-51 mm. AISI316. (H138348)
MS66	Fisher 657/667 sizes 70...87, stroke length 76-102 mm. AISI316. (H138349)

### 3RD PARTY MOUNTING SETS for NDX / Rotary actuators

Mounting sets between the NDX valve controllers and rotary actuators, including bracket and feedback system.

MS81	Mounting set for rotary actuators with VDI/VDE 3845 attachment face, also Neles B-series actuators B1CU/ B1JU 6...11. Attachment dimensions 80X30-20 (VDI1). (H141553)
MS82	Mounting set for rotary actuators with VDI/VDE 3845 attachment face. Attachment dimensions 80X30-30 (VDI 2). (H141561)
MS83	Mounting set for rotary actuators with VDI/VDE 3845 attachment face, also Neles B-series actuators B1CU/ B1JU 12...20. Attachment dimensions 130X30-30 (VDI3). (H141563)
MS84	Mounting set for rotary actuators with VDI/VDE 3845 attachment face. Attachment dimensions 130X30-50 (VDI 4). (H141562)

### IMOs for NDX

NDX delivery includes the Quick Guide only. The IMO is available in electronic format via [www.valmet.com/ndx](http://www.valmet.com/ndx). If a printed IMO is required with the delivery, use the following.

IM01	NDX IMO English. 7NDX71_EN. (H137441)
IM02	NDX IMO Chinese. 7NDX71_ZH. (H143226)

Subject to change without prior notice.

Neles, Neles Easyflow, Jamesbury, Stonel, Valvcon and Flowrox, and certain other trademarks, are either registered trademarks or trademarks of Valmet Oyj or its subsidiaries in the United States and/or in other countries.

#### Valmet Flow Control Oy

Vanha Porvoontie 229, 01380 Vantaa, Finland.

Tel. +358 10 417 5000.

[www.valmet.com/flowcontrol](http://www.valmet.com/flowcontrol)

