

Input/output modules

Model number
 IO96Y03FA
 IO96W03FA (DIN)



These I/O modules are designed to function as an AS-Interface slave device with termination points for connecting switches/sensors as well as output devices, such as solenoid valves and relays.

Features

- Four (4) discrete inputs
- Four (4) power outputs
- LED input and output status displays
- AS-Interface power ok LED
- Direct mount or DIN rail mount available




Specifications	
AS-Interface profile	ID = F, I/O = 7 (4DI, 4DO)
Discrete inputs	(4) 3 mA @ 28 VDC; gold contact mechanical, low power reed, or proximity sensor
Discrete outputs	(4) 28 VDC (4 watts total power available)
Operating voltage	AS-Interface voltage
Current consumption	< 40 mA (with no outputs energized)
Indication	(4) input state LEDs (green) (4) output state LEDs (green) (1) AS-i power OK LED (green)
Dimensions (L, W, H)	100mm, 67mm, 63mm
Housing	Engineered resin
Operating temperature	-40° to +80°C (-40° to +176°F)

AS-Interface profile and data locations

Input data
 Input 0 = DIO
 Input 1 = DI1
 Input 2 = DI2
 Input 3 = DI3


Output data
 Output 0 = DO0
 Output 1 = DO1
 Output 2 = DO2
 Output 3 = DO3

Dimensions (mm)

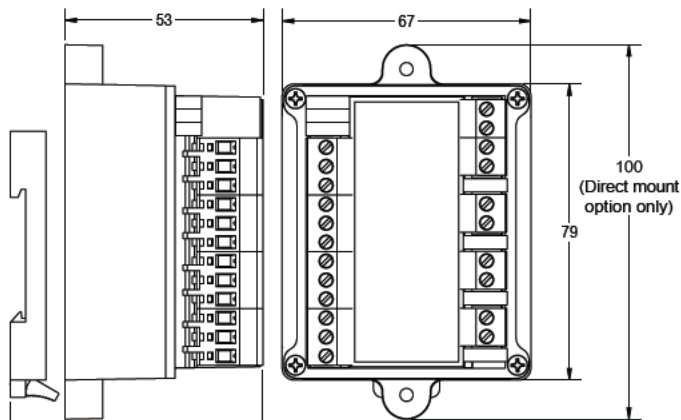

DIN rail clip only applies to DIN models.

Wiring diagram

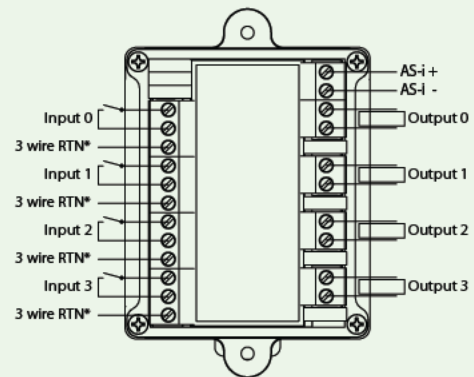

*Only for use with 3 wire PNP sensors



Valmet's professionals around the world work close to our customers and are committed to moving our customers' performance forward – every day.

Valmet Flow Control Oy

Vanha Porvoontie 229
01380 Vantaa, Finland
flowcontrol@valmet.com
+358 10 417 5000
valmet.com/flowcontrol

**Valmet Flow Control Inc.
Stonel product center**

26271 US Hwy 59, Fergus Falls, MN 56537 USA.
Tel. +1 218 739 5774.
sales.stonel@valmet.com
valmet.com/flowcontrol

