

## Stonel™ Quartz™ explosionproof, nonincendive, I.S. & general purpose on/off valve monitor

### QX/QN/QG/QC series





### Explosionproof valve monitoring

The Quartz is available in explosionproof (QX), nonincendive or intrinsically safe (QN), low temperature (QC) and general purpose (QG) versions. The robust epoxy-coated anodized aluminum construction, and optional stainless steel version, makes this platform extremely durable and well-suited for use in corrosive, heavy washdown environments.

Options may be selected to accommodate most applications.

#### The Quartz series

The Stonel Quartz series is durable, corrosion-resistant, and versatile, making it ideal for most of your process valve monitoring requirements.

#### Enclosures optimized for environment



**QX:** Explosionproof, water tight and corrosion-resistant enclosure is approved for use in Div. 1/Zone 1 hazardous areas. Available options include stainless steel and epoxy-coated anodized aluminum.




**QN:** Nonincendive is approved for Div. 2/Zone 2 hazardous environments with proximity sensors using a clear cover. Intrinsically safe NAMUR sensors or passive switches are available for Div. 1/Zone 0 applications.



**QG:** General purpose features a clear Lexan® cover with mechanical switches. All enclosures are Type 4, 4x, and 6.


#### Save space with low profile design

Clearance above the actuator is critical in complex piping systems. Quartz boldly displays valve position and encloses all electrical components in an explosionproof compartment with less than 5" clearance requirement.

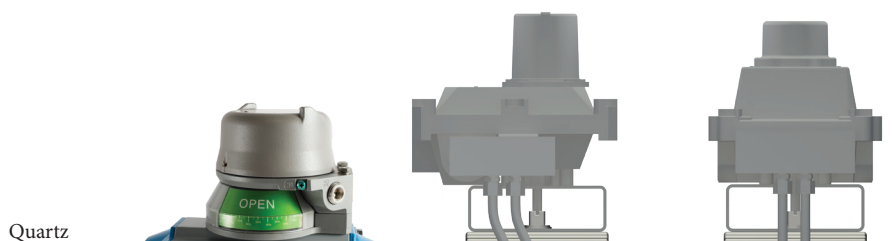

## Features


- 1. Enclosures optimized for environment**  
Available in three enclosure styles suitable for use in various process environment areas.
- 2. Rapid enclosure access**  
Screw-on cover allows quick enclosure access, saving you valuable maintenance and set-up time. The cover provides a vaportight seal and allows entry to internal components in less than five seconds.
- 3. Faster wiring**  
Pre-wired and labeled terminal strip enables quick, convenient attachment of field wires.
- 4. Wide variety of switching & communication**  
Switching options include dual module sensors and communication, Maxx-Guard proximity switches, and mechanical switches. Continuous signal output is available in a 4-20 mA position transmitter.
- 5. Quick set cams are easy to adjust**  
Touch and tune switch settings allow you to make adjustments in seconds without the use of tools.
- 6. Dual shaft o-ring seals eliminate corrosion**  
Top inner and bottom outer shaft o-rings seal the drive bushing from both external corrosives and internal contaminants that enter the enclosure.
- 7. Special drive bushing assures long cycle life**  
The oil impregnated bronze bushing maintains smooth operation and eliminates the potential for shaft seizure due to actuator shaft eccentricity.

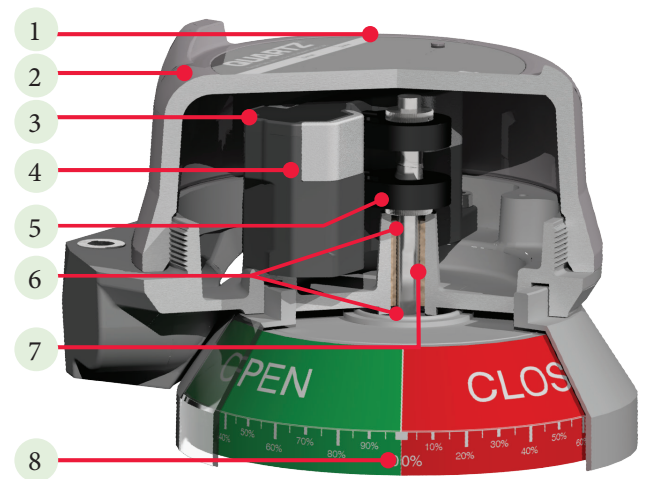


- 8. Bold space saving visual indication**  
Visual indicator offers excellent viewability without sacrificing accessibility or adding to space requirements. Indicators are also available with continuous percentage or three-way indication. (See page 17).

### Wide variety of switch/sensor functions

A wide variety of switch/sensor communications and position transmitters may be selected for the Quartz series. Options include 2, 4 or 6 mechanical or proximity switches, position transmitters with or without switches, and our dual module with two SST or two NAMUR sensors or AS-Interface, DeviceNet™ or Foundation Fieldbus communication capabilities.



Proximity switches



Mechanical switches

### Speed installation with LED indication

Our coordinated visual indicator and LEDs give you an extra measure of safety and increased convenience during plant start-up and operation. Green visual indication and green LED means the valve is open and the computer circuit is properly operating. Red visual indication and red LED means the valve is closed and the computer is properly matched. All systems are functioning properly.



### Eliminate seal fittings in Division 1 and 2 areas

FMus ratings certify the Quartz QX series with proximity switches for use without seal fittings in all hazardous areas. By passing special pressure piling tests, the all aluminum enclosure was certified for this elite distinction. Now, a time-consuming procedure can be safely eliminated in Division 1 and Division 2 areas.

### Consolidate your components and minimize costs

The Quartz design offers up to three conduit entries with extra wire terminations. By terminating solenoid valves in the switch enclosure, significant savings are realized by eliminating a junction box, wiring, conduit materials, and labor.



## Mounting kits


Kits may be ordered in 316 stainless steel. Consult factory for details.

### Sealed mounting kit

Mounting to standard actuators is achieved with a bold visual indicator and sealed mounting system. Sealed mounting is exclusive with extended visual indicator option N. Adaptor plate is epoxy-coated anodized aluminum. All fasteners and couplings are stainless steel.



- Direct mount to actuators with VDI/VDE 3845 interface.
- Tolerant to vibration and mechanical stress.
- Prevents contamination and icing in coupling area.
- Available for all VDI/VDE 3845 (NAMUR) mounting configurations and most quarter-turn actuators.

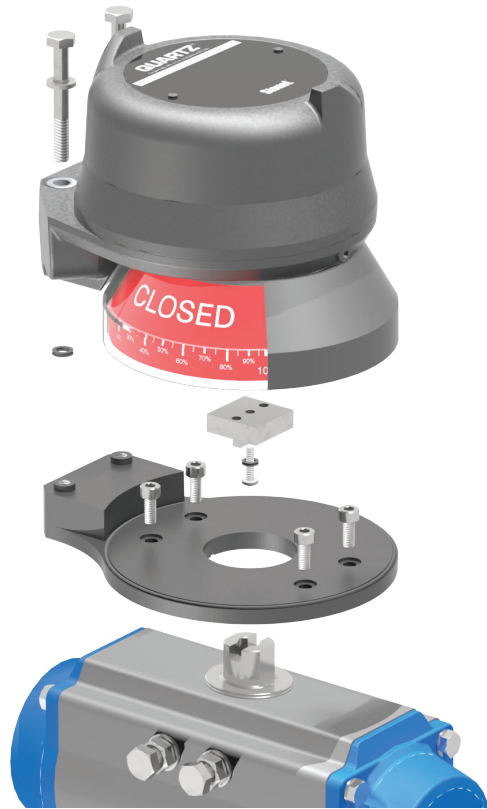

### Quarter-turn actuators

Low profile convenient mounting systems are readily available in stainless steel for most standard actuators.



### Manual valves

Proper fit and operation is assured with our custom designs for each manual valve. Hundreds of unique mounting systems have been designed and fabricated for manually operated valves.



### Positioners

Quartz position transmitter and switches may be retrofitted directly to most positioners. 4-20 feedback may be provided on simple pneumatic positioners.



### Linear operators

Precision ball joint connections attach the Quartz to valve travel stems. Stroke lengths ranging from 20 mm to 150 mm (¾" to 6") may be easily accommodated.



## Quartz stainless steel option



### For the most challenging environments

The explosionproof Quartz for process valve monitoring is available with a 316 stainless steel enclosure that is extremely durable and well-suited for use in corrosive, heavy washdown and high seas environments. A broad range of switching, position transmitters and communication options may be selected to accommodate most applications.

You can attach the Quartz to quarter-turn actuators, manual operators, linear operators, and positioners using readily available stainless steel mounting systems.



## Position transmitter

### 4-20 mA position transmitter

Position transmitters provide a precise 4-20 mA signal on a two-wire DC loop. Control valves and dampers are accurately monitored through their range of travel offering assurance of exact valve position at all times. Several function options are available making it easy to find the correct product that fits your desired application. Choose a position transmitter with a standard potentiometer (5\_), a vibration proof, high-performance potentiometer (7\_), or the innovative non-contact magnetic resistive (mag res) digital transmitter (T\_).

### Digital transmitter


The digital transmitter utilizes an innovative non-contact magnetic sensor. The module features easy push button calibration to reduce set-up and commissioning time. With the bold red/green LED indication, the unit is visible from a distance and the calibration diagnostic LED indications confirm set up is valid. The position transmitter module housed with the Quartz platform is fully sealed and potted, providing reliable operation and outstanding vibration tolerance in tough applications.

### Position transmitter specifications

|                     | Standard transmitter (5_) | High performance transmitter (7_) | Digital transmitter (T_) |
|---------------------|---------------------------|-----------------------------------|--------------------------|
| Output              | 2-wire 4-20 mA            | 2-wire 4-20 mA                    | 2-wire 4-20 mA           |
| Supply source       | 10 - 40 VDC               | 10 - 40 VDC                       | 10 - 40 VDC              |
| Indication          | None                      | None                              | Red/Green LED*           |
| Span range          | 35° to 270°               | 35° to 270°                       | 35° to 320°              |
| Maximum loading     | 700 ohms @ 24 VDC         | 700 ohms @ 24 VDC                 | 683 ohms @ 24 VDC        |
| Refresh rate        | < 1 ms                    | < 1 ms                            | < 5 ms                   |
| Linearity error     | +/-0.85°                  | +/-0.35°                          | +/-0.35°                 |
| Cycle life          | 2 million rotations       | 50 million rotations              | Unlimited                |
| Vibration tolerance | Acceptable                | Outstanding                       | Outstanding              |

\* Open / Closed LED position indication and calibration status diagnostics

### Electrical schematic

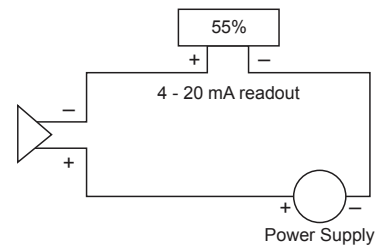

Position transmitter



Digital transmitter

## Sensors and communications

### Dual module system

The Quartz series is available with the dual module in its various configurations. Two solid state sensors and/or communications and other electronics are sealed in for the ultimate in reliability and convenience. All dual module versions have a five year warranty.



| Switching and sensor specifications |   |
|-------------------------------------|---|
| SST switching sensors (35)          |   |
| Configuration                       | (2) SST solid state sensors<br>Wire terminations for one or two solenoids |
| Operations                          | Normally open (NO)<br>for Normally closed (NC), consult factory           |
| Maximum current inrush              | 1.0 amp   |
| Maximum current continuous          | 0.1 amp   |
| Minimum on current                  | 0.5 mA  |
| Maximum leakage current             | 0.25 mA (AC)<br>0.15 mA (DC)  |
| Voltage range                       | 20 - 250 VAC<br>8 - 250 VDC   |
| Maximum voltage drop                | 6.5 volts @ 10 mA<br>7.2 volts @ 100 mA                                   |
| Wiring diagram (35)                 |   |

| Sensor specifications |  |
|-----------------------|--|
| NAMUR sensor (45)     |  |
| Configuration         | (2) NAMUR sensors (EN 60947-5-6; I.S.)<br>Wire terminations for one or two solenoids |
| Operation             | Normally closed NAMUR sensors (solid state)  |
| Voltage range         | 5 - 25 VDC   |
| Current ratings       | Target on I < 1 mA<br>Target off I > 3 mA  |
| Wiring diagram (45)   |  |

| Sensor specifications         |  |
|-------------------------------|--|
| P+F NAMUR sensors (_A and _N) |  |
| Configuration                 | (2) NAMUR sensors (EN 60947-5-6)<br>_A sensor NJ2-12GK-SN<br>_N sensor NJ2-V3-N-V5 |
| Operation                     | NO/NC (cam selectable)   |
| Current ratings               | Target present   Current < 1.0 mA<br>Target absent   Current > 3.0 mA              |
| Voltage range                 | 5 - 25 VDC   |
| Operating life                | Unlimited  |
| P+F NAMUR sensors (_B)        |  |
| Configuration                 | (2) NAMUR NO sensors (EN 60947-5-2)<br>NJ5-30GK-S1N                                |
| Operation                     | NO/NC (cam selectable)   |
| Current ratings               | Target present   Current > 3.0 mA<br>Target absent   Current < 1.0 mA              |
| Voltage range                 | 5 - 25 VDC   |
| Operating life                | Unlimited  |


## Sensors and communications

### Valve Communication Terminal (VCT) specifications

#### AS-Interface (96)

|                     |  |
|---------------------|--|
| Configuration       | (2) Discrete sensor inputs<br>(2) Auxiliary discrete inputs<br>(2) Power outputs (solenoids) |
| Maximum current     | 160 mA, both outputs combined  |
| Auxiliary inputs    | 24 VDC @ 2 mA (self-powered)   |
| Output              | 4 watts @ 24 VDC both outputs combined   |
| Outputs, voltage    | 21 - 26 VDC  |
| Configuration code  | ID=F, IO=4; user defined (4DI/2DO)   |
| AS-i version        | 3.0  |
| Devices per network | 31   |


Wiring diagram (96)

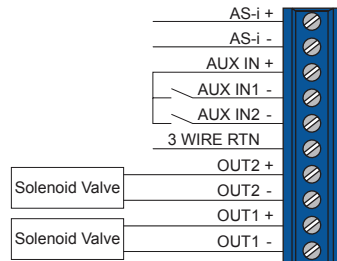

#### AS-Interface VCT with extended addressing (97)

|                     |  |
|---------------------|--|
| Configuration       | (2) Discrete sensor inputs<br>(2) Auxiliary discrete inputs<br>(1) Power output (solenoid) |
| Maximum current     | 100 mA   |
| Auxiliary inputs    | 24 VDC @ 2 mA (self-powered)   |
| Output              | 2 watts @ 24 VDC   |
| Output, voltage     | 21 - 26 VDC  |
| Configuration code  | ID=A, IO=4; user defined (4DI/1DO)   |
| AS-i version        | 3.0  |
| Devices per network | 62   |

Wiring diagram (97)

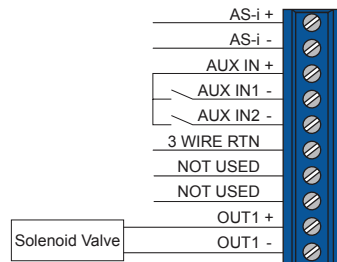


### Valve Communication Terminal (VCT) specifications

#### Foundation Fieldbus VCT, bus powered (93)

|                     |  |
|---------------------|--|
| Configuration       | (2) Discrete Inputs<br>(2) Power outputs (solenoids)<br>Multiple DI/DO blocks or modified output block |
| Outputs             | 2 mA @ 6.5 VDC each<br>current limited to 2 mA (bus powered)   |
| Devices per network | Max of 16 devices recommended  |

Wiring diagram (93)




### Valve Communication Terminal (VCT) specifications

#### DeviceNet™ (92)

|                   |  |
|-------------------|--|
| Configuration     | (2) Discrete inputs (open and closed)<br>(2) Power outputs (solenoids)<br>(1) 4-20 mA auxiliary analog input, 10-bit resolution; no additional power source required |
| Transmission rate | Software selectable 125K, 250K or 500K baud  |
| Messaging         | Polling, cyclic and change of state  |
| Outputs           | 4 watts @ 24 VDC outputs combined  |
| Outputs, voltage  | 24 VDC (with input voltage ranging from 10 - 24 VDC)   |
| Other features    | Predetermined output fail state  |

Wiring diagram (92)

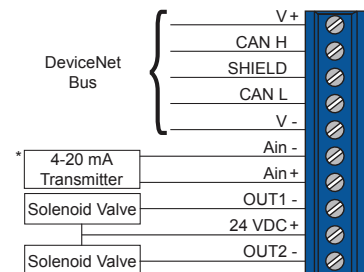


\* 4-20 mA transmitter not included

## Sensors and switches

### Maxx-Guard proximity switch


Maxx-Guard hermetically-sealed switches are suitable for computer input circuits and general purpose applications. SPDT tungsten contacts are designed for 125 VAC computer inputs and 240 VAC moderate power applications. SPDT rhodium contacts are suitable for both 24 VDC and 120 VAC computer inputs. SPST ruthenium contacts are ideal for either 24 VDC or 125 VAC low power computer inputs.



#### Maxx-Guard proximity switch Single-Pole Single-Throw (SPST)

| J switch             |   |
|----------------------|---|
| Configuration        | SPST NO; passive (intrinsically safe)   |
| Electrical ratings   | 0.10 amp @ 10 - 30 VDC                  |
| Maximum voltage drop | 0.1 volts @ 10 mA<br>0.5 volts @ 100 mA |
| Contact composition  | Ruthenium                               |

| P switch             |   |
|----------------------|---|
| Configuration        | SPST NO                                 |
| Electrical ratings   | 0.15 amp @ 125 VAC/30 VDC               |
| Maximum voltage drop | 0.1 volts @ 10 mA<br>0.5 volts @ 100 mA |
| Contact composition  | Ruthenium                               |



#### Maxx-Guard proximity switch Single-Pole Double-Throw (SPDT)

| G switch             |   |
|----------------------|---|
| Configuration        | SPDT                                    |
| Electrical ratings   | 0.2 amp @ 120 VAC<br>0.30 amp @ 24 VDC  |
| Maximum voltage drop | 0.1 volts @ 10 mA<br>0.5 volts @ 100 mA |
| Contact composition  | Rhodium                                 |

| H switch             |   |
|----------------------|---|
| Configuration        | SPDT  |
| Electrical ratings   | 240 volts max; 3 amps max<br>100 watts max; 2.0 watts min |
| Maximum voltage drop | 0.1 volts @ 10 mA<br>0.5 volts @ 100 mA                   |
| Contact composition  | Tungsten  |

| M switch             |   |
|----------------------|---|
| Configuration        | SPDT; passive (intrinsically safe)      |
| Electrical ratings   | 0.10 amp @ 10 - 30 VDC                  |
| Maximum voltage drop | 0.1 volts @ 10 mA<br>0.5 volts @ 100 mA |
| Contact composition  | Rhodium                                 |

| S switch             |   |
|----------------------|---|
| Configuration        | SPDT (LED)                              |
| Electrical ratings   | 0.1 amp @ 120 VAC<br>0.1 amp @ 24 VDC   |
| Maximum voltage drop | 3.5 volts @ 10 mA<br>6.5 volts @ 100 mA |
| Contact composition  | Rhodium                                 |

| S switch             |   |
|----------------------|---|
| Configuration        | SPDT (LED)                              |
| Electrical ratings   | 0.1 amp @ 120 VAC<br>0.1 amp @ 24 VDC   |
| Maximum voltage drop | 3.5 volts @ 10 mA<br>6.5 volts @ 100 mA |
| Contact composition  | Rhodium                                 |



#### Specifications

|                   |                                    |
|-------------------|------------------------------------|
| Temperature range | -40° C to 80° C (-40° F to 176° F) |
| Seal              | Hermetically-sealed                |
| Operating life    | 5 million cycles                   |
| Warranty          | Two years                          |



## Sensors and switches

### Mechanical switch (SPDT)

Low cost single-pole double-throw mechanical switches with silver contacts are recommended for high power 125 VAC applications. Gold contacts may be used in 24 VDC computer input applications when cycle life does not exceed 100,000 operations.

#### Mechanical switch (SPDT)

##### Silver contacts (\_V switch)

Electrical ratings 10 amp @ 125 / 250 VAC  
0.5 amp @ 125 VDC

Operating life 400,000 cycles

Not recommended for electrical circuits operating at less than 20 mA @ 24 VDC.

##### Gold contacts (\_W switch)

Electrical ratings 1 amp @ 125 VAC  
0.5 amp @ 30 VDC

Operating life 100,000 cycles



### Mechanical switch (DPDT)

Double-pole double-throw mechanical switches enable two electrical circuits to be activated simultaneously. Each switch circuit is electrically isolated from the other. As with standard silver contacts, DPDT switches are designed to operate in high-power applications.


#### Mechanical switch (DPDT)

##### 14 switch

Electrical ratings 4.5 amp @ 125 / 250 VAC, 24 - 125 VDC

Operating life 250,000 (VAC), 100,000 (VDC) cycles

Not recommended for electrical circuits operating at less than 20 mA @ 24 VDC.



### SST switching sensor

Solid state SST proximity sensors are ideal for use in AC and DC computer input circuits.

#### SST switching sensors

##### \_X switch

Operation NO/NC (cam selectable)

Maximum inrush current 1.0 amps @ 125 VAC/VDC

Maximum continuous current 0.1 amps @ 125 VAC/VDC

Minimum on current 2.0 mA


Leakage current Less than 0.50 mA

Voltage range 24 - 125 VAC  
8 - 125 VDC

Maximum voltage drop 6.5 volts @ 10 mA  
7.5 volts @ 100 mA

Operating life Unlimited

Warranty Five years



### Model selector

**SERIES**  
QX Explosionproof dual modules and VCTs

**FUNCTIONS**  
Sensor/switching modules (proximity type)  
35 SST Universal NO switching sensor dual module  
45 NAMUR dual module (EN 60947-5-6; I.S.)

**Valve Communication Terminals (VCTs)**  
92 DeviceNet™  
93 Foundation Fieldbus (bus powered; I.S.)  
96 AS-Interface  
97 AS-Interface (with extended addressing)

**ENCLOSURE**  
E Aluminum North American (NEC/CEC)  
R Aluminum International (IEC)  
F Aluminum Brazilian  
V Aluminum Russian  
K Aluminum China (CCC)  
S\* Stainless steel North American (NEC/CEC)  
T\* Stainless steel International (IEC)  
M\* Stainless steel Brazilian  
L\* Stainless steel Russian  
N\* Stainless steel China (CCC)  
\* Available with 03 or 06 conduit entry only

**CONDUIT ENTRIES**  
02 (1) 3/4" NPT & (1) 1/2" NPT  
03 (1) 3/4" NPT & (2) 1/2" NPT  
05 (2) M20  
06 (3) M20

**OUTPUT**  
S Short visual indicator  
N Extended visual indicator  
H Neles "H" coupler

**VISUAL INDICATOR [see chart on page 17]**  
RA Red closed/green open  
GA Green closed/red open  
1A T-1 three way flow path  
2A T-2 three way flow path  
3A T-3 three way flow path  
4A T-4 three way flow path  
5A T-5 three way flow path  
0A No mechanical indication  
XA Special  
CA Continuous

Model number example  
QX 35 E 02 N RA - OPTIONAL

**MODEL NUMBER**      **PARTNERSHIP ID**  
Mounting hardware required and sold separately.      Some models may include 5-digit identification suffix.

### Model selector

**SERIES**  
QX Explosionproof proximity switches

**FUNCTIONS**  
**Sensors**  
2E (2) P+F special 3-wire NPN sensor; NBB2-V3-E0-V5  
2F (2) PNP solid state 3-wire P+F sensor; NBB2-V3-E2-V5  
2G (2) SPDT Maxx-Guard (low current)  
2H (2) SPDT Maxx-Guard (3 amp)  
2L (2) SPST Maxx-Guard (LED)  
2P (2) SPST Maxx-Guard  
2S (2) SPDT Maxx-Guard (LED)  
4G (4) SPDT Maxx-Guard (low current)  
4H (4) SPDT Maxx-Guard (3 amp)  
4L (4) SPST Maxx-Guard (LED)  
4P (4) SPST Maxx-Guard  
4S (4) SPDT Maxx-Guard (LED)

**ENCLOSURE**  
E Aluminum North American (NEC/CEC)  
R Aluminum International (IEC)  
F Aluminum Brazilian  
V Aluminum Russian  
K Aluminum China (CCC)  
S\* Stainless steel North American (NEC/CEC)  
T\* Stainless steel International (IEC)  
M\* Stainless steel Brazilian  
L\* Stainless steel Russian  
N\* Stainless steel China (CCC)  
\* Available with 03 or 06 conduit entry only

**CONDUIT ENTRIES**  
02 (1) 3/4" NPT & (1) 1/2" NPT  
03 (1) 3/4" NPT & (2) 1/2" NPT  
05 (2) M20  
06 (3) M20

**OUTPUT**  
S Short visual indicator  
N Extended visual indicator  
H Neles "H" coupler

**VISUAL INDICATOR [see chart on page 17]**  
RA Red closed/green open  
GA Green closed/red open  
1A T-1 three way flow path  
2A T-2 three way flow path  
3A T-3 three way flow path  
4A T-4 three way flow path  
5A T-5 three way flow path  
0A No mechanical indication  
XA Special  
CA Continuous

Model number example  
QX 2G R 02 N RA - OPTIONAL

**MODEL NUMBER**      **PARTNERSHIP ID**  
Mounting hardware required and sold separately.      Some models may include 5-digit identification suffix.

**Model selector**

| SERIES   |  |
|--|--|
| QX   | Explosionproof mechanical switches and position transmitters         |
| FUNCTIONS  |  |
| Mechanical switches                                    |  |
| 2V   | (2) SPDT switches  |
| 2W   | (2) SPDT switches, gold contact                                      |
| 4V   | (4) SPDT switches  |
| 4W   | (4) SPDT switches, gold contact                                      |
| 14   | (2) DPDT switches  |
| Position transmitters                                  |  |
| 5O   | Standard with no switches  |
| 5G   | Standard with (2) SPDT Maxx-Guard (low current)                      |
| 5V   | Standard with (2) SPDT mechanical switches                           |
| 5W   | Standard with (2) SPDT mechanical switches, gold contact             |
| 53   | Standard with SST (33) NO switching sensor dual module               |
| 54   | Standard with NAMUR (44) dual module (EN 60947-5-6; I.S.)            |
| 7O   | High performance (HP) with no switches                               |
| 7G   | HP with (2) SPDT Maxx-Guard (low current)                            |
| 73   | HP with SST (33) NO switching sensor dual module                     |
| 74   | HP with NAMUR (44) dual module (EN 60947-5-6; I.S.)                  |
| TO   | 4-20 mA non-contact with no switches                                 |
| TT   | 4-20 mA non-contact with SST (35) NO switching sensor dual module    |
| TR   | 4-20 mA non-contact with NAMUR (45) dual module (EN 60947-5-6; I.S.) |
| ENCLOSURE  |  |
| E  | Aluminum North American (NEC/CEC)                                    |
| R  | Aluminum International (IEC)   |
| F  | Aluminum Brazilian   |
| V  | Aluminum Russian   |
| K  | Aluminum China (CCC)   |
| S*   | Stainless steel North American (NEC/CEC)                             |
| T*   | Stainless steel International (IEC)                                  |
| M*   | Stainless steel Brazilian  |
| L*   | Stainless steel Russian  |
| N*   | Stainless steel China (CCC)  |
| * Available with 03 or 06 conduit entry only           |  |
| CONDUIT ENTRIES  |  |
| 02   | (1) 3/4" NPT & (1) 1/2" NPT  |
| 03   | (1) 3/4" NPT & (2) 1/2" NPT  |
| 05   | (2) M20  |
| 06   | (3) M20  |
| OUTPUT   |  |
| S  | Short visual indicator   |
| N  | Extended visual indicator  |
| H  | Neles "H" coupler  |
| VISUAL INDICATOR <small>[see chart on page 17]</small> |  |
| RA   | Red closed/green open  |
| GA   | Green closed/red open  |
| 1A   | T-1 three way flow path  |
| 2A   | T-2 three way flow path  |
| 3A   | T-3 three way flow path  |
| 4A   | T-4 three way flow path  |
| 5A   | T-5 three way flow path  |
| 0A   | No mechanical indication   |
| XA   | Special  |
| CA   | Continuous   |
| Model number example                                   |  |
| QX   | 2V E 02 N RA - OPTIONAL  |
| MODEL NUMBER   |  |
| Mounting hardware required and sold separately.        |  |
| PARTNERSHIP ID   |  |
| Some models may include 5-digit identification suffix. |  |

**Model selector**

| SERIES   |  |
|--|--|
| QX   | International dual Ex d / Ex ia certified                            |
| FUNCTIONS  |  |
| Sensor/switching modules (proximity type)              |  |
| 45   | NAMUR dual module (EN 60947-5-6; I.S.)                               |
| Sensors  |  |
| 2A   | (2) P+F; NJ2-12GK-SN   |
| 2B   | (2) P+F; NJ5-30GK-SIN  |
| 2J   | (2) SPST (passive)   |
| 2M   | (2) SPDT (passive)   |
| 2N   | (2) P+F NAMUR sensors; NJ2-V3-N                                      |
| 4A   | (4) P+F; NJ2-12GK-SN   |
| 4J   | (4) SPST (passive)   |
| 4M   | (4) SPDT (passive)   |
| Position transmitters                                  |  |
| TO   | 4-20 mA non-contact with no switches                                 |
| TR   | 4-20 mA non-contact with NAMUR (45) dual module (EN 60947-5-6; I.S.) |
| ENCLOSURE  |  |
| R  | Aluminum International (IEC)   |
| V  | Aluminum Russian   |
| K  | Aluminum China (CCC)   |
| T*   | Stainless steel International (IEC)                                  |
| L*   | Stainless steel Russian  |
| N*   | Stainless steel China (CCC)  |
| * Available with 03 or 06 conduit entry only           |  |
| CONDUIT ENTRIES  |  |
| 02   | (1) 3/4" NPT & (1) 1/2" NPT  |
| 03   | (1) 3/4" NPT & (2) 1/2" NPT  |
| 05   | (2) M20  |
| 06   | (3) M20  |
| OUTPUT   |  |
| S  | Short visual indicator   |
| N  | Extended visual indicator  |
| H  | Neles "H" coupler  |
| VISUAL INDICATOR <small>[see chart on page 17]</small> |  |
| RA   | Red closed/green open  |
| GA   | Green closed/red open  |
| 1A   | T-1 three way flow path  |
| 2A   | T-2 three way flow path  |
| 3A   | T-3 three way flow path  |
| 4A   | T-4 three way flow path  |
| 5A   | T-5 three way flow path  |
| 0A   | No mechanical indication   |
| XA   | Special  |
| CA   | Continuous   |
| Model number example                                   |  |
| QX   | 45 R 02 N RA - OPTIONAL  |
| MODEL NUMBER   |  |
| Mounting hardware required and sold separately.        |  |
| PARTNERSHIP ID   |  |
| Some models may include 5-digit identification suffix. |  |

| Model selector                                   |  |
|--|--|
| <b>SERIES</b>                                    |  |
| QN Nonincendive dual modules and VCTs            |  |
| <b>FUNCTIONS</b>                                 |  |
| <b>Sensor/switching modules (proximity type)</b> |  |
| 35   | SST Universal NO switching sensor dual module          |
| <b>Valve Communication Terminals (VCTs)</b>      |  |
| 92   | DeviceNet™   |
| 93   | Foundation Fieldbus (bus powered) [intrinsically safe] |
| 96   | AS-Interface   |
| 97   | AS-Interface with extended addressing                  |
| <b>ENCLOSURE</b>                                 |  |
| Clear cover                                      |  |
| C  | North American (NEC/CEC)                               |
| D  | International (IEC)                                    |
| <b>CONDUIT ENTRIES</b>                           |  |
| 02   | (1) ¾" NPT & (1) ½" NPT                                |
| 03   | (1) ¾" NPT & (2) ½" NPT                                |
| 05   | (2) M20  |
| 06   | (3) M20  |
| <b>OUTPUT</b>                                    |  |
| S  | Short visual indicator                                 |
| N  | Extended visual indicator                              |
| H  | Neles "H" coupler                                      |
| <b>VISUAL INDICATOR [see chart on page 17]</b>   |  |
| RA   | Red closed/green open                                  |
| GA   | Green closed/red open                                  |
| 1A   | T-1 three way flow path                                |
| 2A   | T-2 three way flow path                                |
| 3A   | T-3 three way flow path                                |
| 4A   | T-4 three way flow path                                |
| 5A   | T-5 three way flow path                                |
| 0A   | No mechanical indication                               |
| XA   | Special  |
| CA   | Continuous   |
| Model number example                             |  |
| QN 35 C 02 N RA -                                | OPTIONAL   |
| <b>MODEL NUMBER</b>                              | <b>PARTNERSHIP ID</b>                                  |
| Mounting hardware required and sold separately.  | Some models may include 5-digit identification suffix. |

| Model selector                                  |  |
|---|--|
| <b>SERIES</b>                                   |  |
| QN Nonincendive proximity switches              |  |
| <b>FUNCTION</b>                                 |  |
| <b>Sensors</b>                                  |  |
| 2F  | (2) PNP solid state 3-wire P+F sensor; NBB2-V3-E2-V5   |
| 2G  | (2) SPDT Maxx-Guard (low current)                      |
| 2H  | (2) SPDT Maxx-Guard (3 amp)                            |
| 2L  | (2) SPST Maxx-Guard (LED)                              |
| 2P  | (2) SPST Maxx-Guard                                    |
| 2S  | (2) SPDT Maxx-Guard (LED)                              |
| 4G  | (4) SPDT Maxx-Guard (low current)                      |
| 4H  | (4) SPDT Maxx-Guard (3 amp)                            |
| 4L  | (4) SPST Maxx-Guard (LED)                              |
| 4P  | (4) SPST Maxx-Guard                                    |
| 4S  | (4) SPDT Maxx-Guard (LED)                              |
| 4X  | (4) SST sensor (LED)                                   |
| <b>ENCLOSURE</b>                                |  |
| Clear cover                                     |  |
| C   | North American (NEC/CEC)                               |
| D   | International (IEC)                                    |
| <b>CONDUIT ENTRIES</b>                          |  |
| 02  | (1) ¾" NPT & (1) ½" NPT                                |
| 03  | (1) ¾" NPT & (2) ½" NPT                                |
| 05  | (2) M20  |
| 06  | (3) M20  |
| <b>OUTPUT</b>                                   |  |
| S   | Short visual indicator                                 |
| N   | Extended visual indicator                              |
| H   | Neles "H" coupler                                      |
| <b>VISUAL INDICATOR [see chart on page 17]</b>  |  |
| RA  | Red closed/green open                                  |
| GA  | Green closed/red open                                  |
| 1A  | T-1 three way flow path                                |
| 2A  | T-2 three way flow path                                |
| 3A  | T-3 three way flow path                                |
| 4A  | T-4 three way flow path                                |
| 5A  | T-5 three way flow path                                |
| 0A  | No mechanical indication                               |
| XA  | Special  |
| CA  | Continuous   |
| Model number example                            |  |
| QN 2G C 02 N RA -                               | OPTIONAL   |
| <b>MODEL NUMBER</b>                             | <b>PARTNERSHIP ID</b>                                  |
| Mounting hardware required and sold separately. | Some models may include 5-digit identification suffix. |

| Model selector  |  |
|---|--|
| <b>SERIES</b>   |  |
| QN Intrinsically safe (I.S.) proximity switches and position transmitters |  |
| <b>FUNCTIONS</b>  |  |
| Sensor/switching modules (proximity type)                                 |  |
| 45  | NAMUR dual module (EN 60947-5-6; I.S.)                               |
| Sensor  |  |
| 2A  | (2) P+F; NJ2-12GK-SN   |
| 2B  | (2) P+F; NJ5-30GK-S1N  |
| 2J  | (2) SPST (passive)   |
| 2M  | (2) SPDT (passive)   |
| 2N  | (2) P+F NAMUR sensors; NJ2-V3-N                                      |
| 4J  | (4) SPST (passive)   |
| 4M  | (4) SPDT (passive)   |
| 4N  | (4) P+F NAMUR sensors; NJ2-V3-N                                      |
| Position transmitters   |  |
| 5O  | Standard with no switches  |
| 7O  | High performance (HP) with no switches                               |
| TO  | 4-20 mA non-contact with no switches                                 |
| TR  | 4-20 mA non-contact with NAMUR (45) dual module (EN 60947-5-6; I.S.) |
| <b>ENCLOSURE</b>  |  |
| Clear cover   |  |
| C   | North American (NEC/CEC)   |
| H   | Russian  |
| D   | International (IEC)  |
| A   | Chinese (CCC)  |
| Aluminum cover [not explosion proof]                                      |  |
| E   | North American (NEC/CEC)   |
| R   | International (IEC)  |
| V   | Russian  |
| K   | Chinese (CCC)  |
| <b>CONDUIT ENTRIES</b>  |  |
| 02  | (1) ¼" NPT & (1) ½" NPT  |
| 03  | (1) ¾" NPT & (2) ½" NPT  |
| 05  | (2) M20  |
| 06  | (3) M20  |
| <b>OUTPUT</b>   |  |
| S   | Short visual indicator   |
| N   | Extended visual indicator  |
| H   | Neles "H" coupler  |
| <b>VISUAL INDICATOR [see chart on page 17]</b>                            |  |
| RA  | Red closed/green open  |
| GA  | Green closed/red open  |
| 1A  | T-1 three way flow path  |
| 2A  | T-2 three way flow path  |
| 3A  | T-3 three way flow path  |
| 4A  | T-4 three way flow path  |
| 5A  | T-5 three way flow path  |
| 0A  | No mechanical indication   |
| XA  | Special  |
| CA  | Continuous   |
| Model number example  |  |
| QN  | 45 C 02 N RA - OPTIONAL  |
| <b>MODEL NUMBER</b>   |  |
| Mounting hardware required and sold separately.                           |  |
| <b>PARTNERSHIP ID</b>   |  |
| Some models may include 5-digit identification suffix.                    |  |

| Model selector   |   |
|--|---|
| <b>SERIES</b>  |   |
| QN Nonincendive proximity switches and position transmitters |   |
| <b>FUNCTIONS</b>   |   |
| Position transmitters  |   |
| 5O   | Standard with no switches   |
| 5G   | Standard with (2) SPDT Maxx-Guard (low current)                   |
| 7O   | High performance (HP) with no switches                            |
| 7G   | High performance (HP) with (2) SPDT Maxx-Guard (low current)      |
| TO   | 4-20 mA non-contact with no switches                              |
| TT   | 4-20 mA non-contact with SST (35) NO switching sensor dual module |
| <b>ENCLOSURE</b>   |   |
| Clear cover  |   |
| C  | North American (NEC/CEC)  |
| D  | International (IEC)   |
| <b>CONDUIT ENTRIES</b>                                       |   |
| 02   | (1) ¼" NPT & (1) ½" NPT   |
| 03   | (1) ¾" NPT & (2) ½" NPT   |
| 05   | (2) M20   |
| 06   | (3) M20   |
| <b>OUTPUT</b>  |   |
| S  | Short visual indicator  |
| N  | Extended visual indicator   |
| H  | Neles "H" coupler   |
| <b>VISUAL INDICATOR [see chart on page 17]</b>               |   |
| RA   | Red closed/green open   |
| GA   | Green closed/red open   |
| 1A   | T-1 three way flow path   |
| 2A   | T-2 three way flow path   |
| 3A   | T-3 three way flow path   |
| 4A   | T-4 three way flow path   |
| 5A   | T-5 three way flow path   |
| 0A   | No mechanical indication  |
| XA   | Special   |
| CA   | Continuous  |
| Model number example   |   |
| QN   | 5O C 02 N RA - OPTIONAL   |
| <b>MODEL NUMBER</b>  |   |
| Mounting hardware required and sold separately.              |   |
| <b>PARTNERSHIP ID</b>  |   |
| Some models may include 5-digit identification suffix.       |   |

| Model selector                                   |  |
|--|--|
| <b>SERIES</b>                                    |  |
| QC   | Low temperature, explosionproof dual modules           |
| <b>FUNCTIONS</b>                                 |  |
| <b>Sensor/switching modules (proximity type)</b> |  |
| 35   | SST Universal NO switching sensor dual module          |
| 45   | NAMUR dual module (EN 60947-5-6; I.S.)                 |
| <b>ENCLOSURE</b>                                 |  |
| E  | Aluminum North American (NEC/CEC)                      |
| R  | Aluminum International (IEC)                           |
| V  | Aluminum Russian                                       |
| K  | Aluminum Chinese (CCC)                                 |
| S  | Stainless steel North American (NEC/CEC)               |
| T  | Stainless steel International (IEC)                    |
| L  | Stainless steel Russian                                |
| N  | Stainless steel Chinese (CCC)                          |
| <b>CONDUIT ENTRIES</b>                           |  |
| 03   | (1) 3/4" NPT & (2) 1/2" NPT                            |
| 06   | (3) M20  |
| <b>OUTPUT</b>                                    |  |
| S  | Short visual indicator                                 |
| N  | Extended visual indicator                              |
| H  | Neles "H" coupler                                      |
| <b>VISUAL INDICATOR</b>                          |  |
| RA   | Red closed/green open                                  |
| GA   | Green closed/red open                                  |
| 1A   | T-1 three way flow path                                |
| 2A   | T-2 three way flow path                                |
| 3A   | T-3 three way flow path                                |
| 4A   | T-4 three way flow path                                |
| 5A   | T-5 three way flow path                                |
| 0A   | No mechanical indication                               |
| XA   | Special  |
| CA   | Continuous   |
| Model number example                             |  |
| QC   | 35 E 02 N RA - OPTIONAL                                |
| <b>MODEL NUMBER</b>                              | <b>PARTNERSHIP ID</b>                                  |
| Mounting hardware required and sold separately.  | Some models may include 5-digit identification suffix. |

| Model selector                                  |  |
|---|--|
| <b>SERIES</b>                                   |  |
| QC  | Low temperature, explosionproof mechanical switches    |
| <b>FUNCTIONS</b>                                |  |
| <b>Mechanical switches</b>                      |  |
| 2V  | (2) SPDT switches                                      |
| 2W  | (2) SPDT switches, gold contact                        |
| 4V  | (4) SPDT switches                                      |
| 4W  | (4) SPDT switches, gold contact                        |
| <b>ENCLOSURE</b>                                |  |
| E   | Aluminum North American (NEC/CEC)                      |
| R   | Aluminum International (IEC)                           |
| V   | Aluminum Russian                                       |
| K   | Aluminum Chinese (CCC)                                 |
| S   | Stainless steel North American (NEC/CEC)               |
| T   | Stainless steel International (IEC)                    |
| L   | Stainless steel Russian                                |
| N   | Stainless steel Chinese (CCC)                          |
| <b>CONDUIT ENTRIES</b>                          |  |
| 03  | (1) 3/4" NPT & (2) 1/2" NPT                            |
| 06  | (3) M20  |
| <b>OUTPUT</b>                                   |  |
| S   | Short visual indicator                                 |
| N   | Extended visual indicator                              |
| H   | Neles "H" coupler                                      |
| <b>VISUAL INDICATOR</b>                         |  |
| RA  | Red closed/green open                                  |
| GA  | Green closed/red open                                  |
| 1A  | T-1 three way flow path                                |
| 2A  | T-2 three way flow path                                |
| 3A  | T-3 three way flow path                                |
| 4A  | T-4 three way flow path                                |
| 5A  | T-5 three way flow path                                |
| 0A  | No mechanical indication                               |
| XA  | Special  |
| CA  | Continuous   |
| Model number example                            |  |
| QC  | 2V E 02 N RA - OPTIONAL                                |
| <b>MODEL NUMBER</b>                             | <b>PARTNERSHIP ID</b>                                  |
| Mounting hardware required and sold separately. | Some models may include 5-digit identification suffix. |

| Model selector                                  |  |
|---|--|
| <b>SERIES</b>                                   |  |
| QG  | General purpose mechanical switches (clear cover)      |
| <b>FUNCTION</b>                                 |  |
| <b>Mechanical switches</b>                      |  |
| 2V  | (2) SPDT switches                                      |
| 2W  | (2) SPDT switches, gold contact                        |
| 4V  | (4) SPDT switches                                      |
| 4W  | (4) SPDT switches, gold contact                        |
| 14  | (2) DPDT switches                                      |
| <b>ENCLOSURE</b>                                |  |
| C   | General purpose, universal                             |
| <b>CONDUIT ENTRIES</b>                          |  |
| 02  | (1) ¾" NPT & (1) ½" NPT                                |
| 03  | (1) ¾" NPT & (2) ½" NPT                                |
| 05  | (2) M20  |
| 06  | (3) M20  |
| <b>OUTPUT</b>                                   |  |
| S   | Short visual indicator                                 |
| N   | Extended visual indicator                              |
| H   | Neles "H" coupler                                      |
| <b>VISUAL INDICATOR</b>                         |  |
| RA  | Red closed/green open                                  |
| GA  | Green closed/red open                                  |
| 1A  | T-1 three way flow path                                |
| 2A  | T-2 three way flow path                                |
| 3A  | T-3 three way flow path                                |
| 4A  | T-4 three way flow path                                |
| 5A  | T-5 three way flow path                                |
| 0A  | No mechanical indication                               |
| XA  | Special  |
| CA  | Continuous   |
| Model number example                            |  |
| QG  | 2V C 02 N RA - OPTIONAL                                |
| <b>MODEL NUMBER</b>                             | <b>PARTNERSHIP ID</b>                                  |
| Mounting hardware required and sold separately. | Some models may include 5-digit identification suffix. |

## Specifications

| Materials of construction   |   |
|-----------------------------|---|
| Housing & cover             | Epoxy-coated anodized marine grade aluminum or stainless steel                                      |
| Clear cover & indicator     | Lexan® polycarbonate  |
| Elastomer seals             | Buna-N; optional EPDM   |
| Drive shaft                 | Stainless steel   |
| Drive bushing               | Bronze, oil impregnated   |
| Fasteners                   | Stainless steel   |
| Operating temperature range | -40° C to 80° C (-40° F to 176° F) (Typical)<br>-55° C to 80° C (-67° F to 176° F) (QC series only) |
| Warranty                    |   |
| Mechanical components       | Two years   |
| SST & dual modules          | Five years  |



Lexan® is a registered trademark of General Electric Corporation.

| Ratings  |  |
|--|--|
| Explosionproof<br><i>(Ex d, Zone 1 or Class I and II, Div. 1)</i>      | QX models*                               |
| Nonincendive<br><i>(Class I and II, Div. 2)</i>                        | QN models*                               |
| Intrinsically safe<br><i>(Ex ia, Zone 0 or Class I and II, Div. 1)</i> | Functions 44, 45, 93, _A, _J, _M and _N* |
| Enclosure protection   |  |
| Type 4, 4X and 6   | All models                               |
| Ingress Protection 66 and 67   | All models                               |
| Approvals*   | See manufacturer's website               |



\* Only models listed on [valmet.com/flowcontrol](http://valmet.com/flowcontrol) website are approved per specific rating.

## Dimensions

### Output option "S" - Short visual indicator

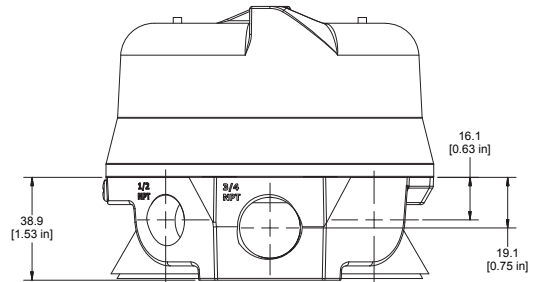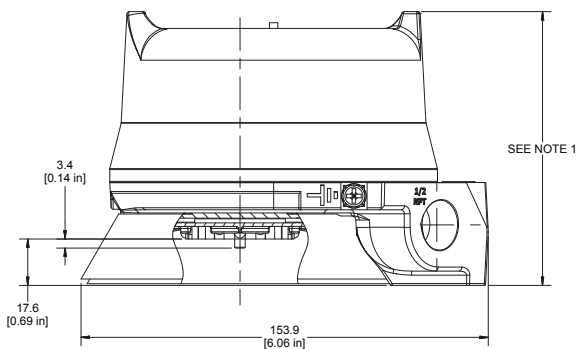

### Output option "N" - Extended visual indicator

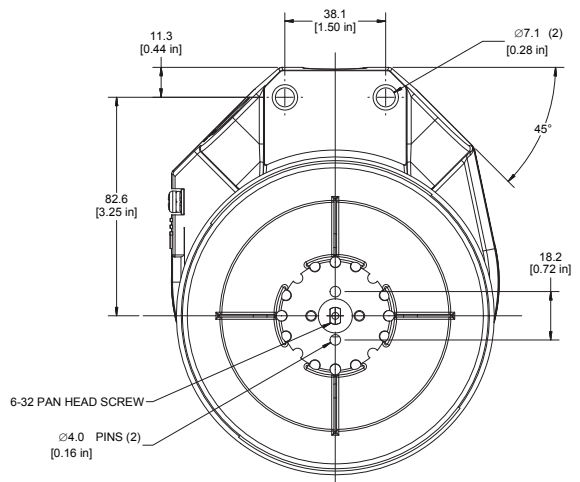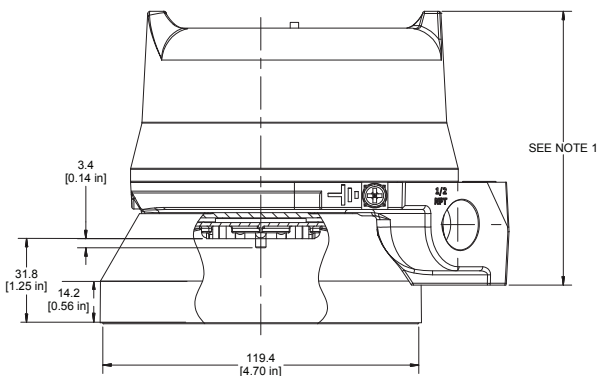














#### NOTE 1

Cover height varies based on model number.  
Dual module and 2-switch models use short covers.

- Short cover = 102 mm [4.0"]
- Medium cover = 123.4 mm [4.86"]
- Tall cover = 155.4 mm [6.12"]



## Visual indicator designations

| DESIGNATION | 0°  | 90°   | 180°   |
|-------------|---|---|--|
| R           | <b>RED CLOSED</b>   | <b>GREEN OPEN</b>   |  |
| G           | <b>GREEN CLOSED</b>   | <b>RED OPEN</b>   |  |
| 1           |  |  |  |
| 2           |  |  |  |
| 3           |  | <b>CLOSED</b>   |  |
| 4           |  |  |  |
| 5           |  |  |  |
| C           |  |   |  |
| X           | Specialty configuration - please consult factory                                  |   |  |

**Valmet Flow Control Inc.**

**Stonel product center**

26271 US Hwy 59, Fergus Falls, MN 56537 USA .

Tel. +1 218 739 5774.

**[sales.stonel@valmet.com](mailto:sales.stonel@valmet.com)**

**[valmet.com/flowcontrol](http://valmet.com/flowcontrol)**

Subject to change without prior notice.

Neles, Neles Easyflow, Jamesbury, Stonel, Valvcon and Flowrox, and certain other trademarks, are either registered trademarks or trademarks of Valmet Oyj or its subsidiaries in the United States and/or in other countries.

For more information [www.neles.com/trademarks](http://www.neles.com/trademarks)

